



HESTORE.HU


elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

USB, für Leiterplattenmontage, A + B Ausführung

USB, for PCB mounting, A + B version

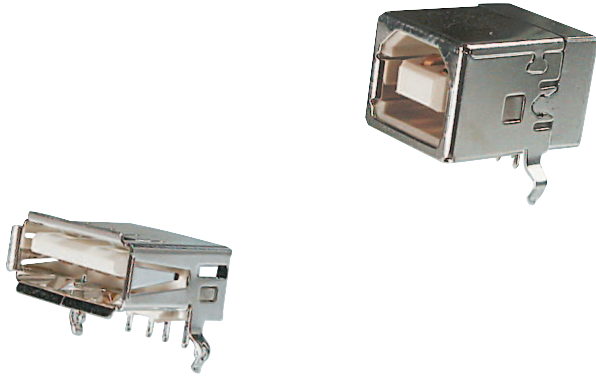

Isolierkörper
PBT, UL94V-0

Insulator
PBT, UL94V-0

Kontakte
Kupferlegierung

Contacts
Copper alloy

Strombelastbarkeit
1A

Current rating
1A

Durchschlagspannung
1000V AC (1min)

Withstanding voltage
1000V AC (1min)

Isolationswiderstand
>1000MΩ min.

Insulation resistance
>1000MΩ min.




Kontaktwiderstand
< 15mΩ max

Contact resistance
< 15mΩ max




Betriebstemperatur
-55°C bis +105°C

Operating temperature
-55°C to +105°C

A-Type



B-Type

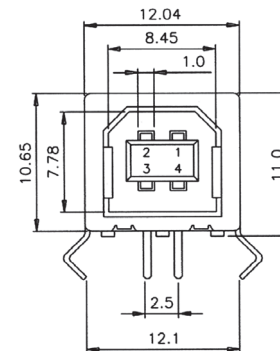

Bestellcode : **A - USBS - x**
Ordercode :

Bitte „x“ durch die unten geeignete Optionen ersetzen
Please replace „x“ with appropriate options listed below

1.

Ausführung

- A - Bauform A
- B - Bauform B

Version

- A - Type A
- B - Type B

1.