EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Schottky Barrier Rectifier

FEATURES

- Low power loss, high efficiency
- Guardring for overvoltage protection
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



TO-220AC



Pb-Free

RoHS COMPLIANT

MECHANICAL DATA

Case： TO-220AC

Molding compound, UL flammability classification rating 94V-0
Base P/N with suffix "G" on packing code - halogen-free, RoHS compliant
Base P/N with prefix "H" on packing code - AEC-Q101 qualified

Terminal： Matte tin plated leads, solderable per JESD22-B102
Meet JESD 201 class 1A whisker test,
with prefix "H" on packing code meet JESD 201 class 2 whisker test

Polarity： As marked

Mounting torque： 5 in-lbs maximum

Weight： 1.88 gram (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERSTICS (T_A=25℃ unless otherwise noted)

PARAMETER	SYMBOL	MBR 1035	MBR 1045	MBR 1050	MBR 1060	MBR 1090	MBR 10100	MBR 10150	MBR 10200	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	35	45	50	60	90	100	150	200	V
Maximum RMS voltage	V_{RMS}	24	31	35	42	63	70	105	140	V
Maximum DC blocking voltage	V_{DC}	35	45	50	60	90	100	150	200	V
Maximum average forward rectified current	$I_{F(AV)}$	10								A
Peak repetitive forward current (Rated VR, Square Wave, 20KHz)	I_{FRM}	20								A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	150								A
Peak repetitive reverse surge current (Note 1)	I_{RRM}	1.0		0.5						A
Maximum instantaneous forward voltage (Note 2) IF=10A, TA=25℃ IF=10A, TA=125℃	V_F	0.70 0.57		0.80 0.70		0.85 0.71		1.05 -		V
Maximum reverse current @ rated VR T_A=25 ℃	I_R	0.1								mA
T_A=125 ℃		15		10		6				
Voltage rate of change (Rated V_R)	dV/dt	10000								V/us
Typical thermal resistance	$R_{\theta JC}$	3								^{O}C/W
Operating junction temperature range	T_J	- 55 to + 150								^{O}C
Storage temperature range	T_{STG}	- 55 to + 175								^{O}C

Note 1： tp = 2.0 μs, 1.0KHz

Note 2：Pulse test with PW=300u sec, 1% duty cycle

ORDERING INFORMATION					
PART NO.	AEC-Q101 QUALIFIED	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING
MBR10xx (Note 1)	Prefix "H"	C0	Suffix "G"	TO-220AC	50 / Tube

Note 1: "xx" defines voltage from 35V (MBR1035) to 200V (MBR10200)

EXAMPLE					
PREFERRED P/N	PART NO.	AEC-Q101 QUALIFIED	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
MBR1060 C0	MBR1060		C0		
MBR1060 C0G	MBR1060		C0	G	Green compound
MBR1060HC0	MBR1060	H	C0		AEC-Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

(TA=25℃ unless otherwise noted)

FIG.1- FORWARD CURRENT DERATING CURVE

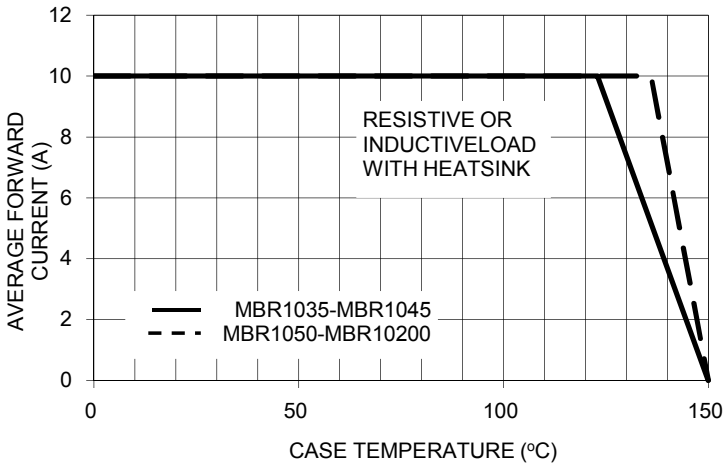


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

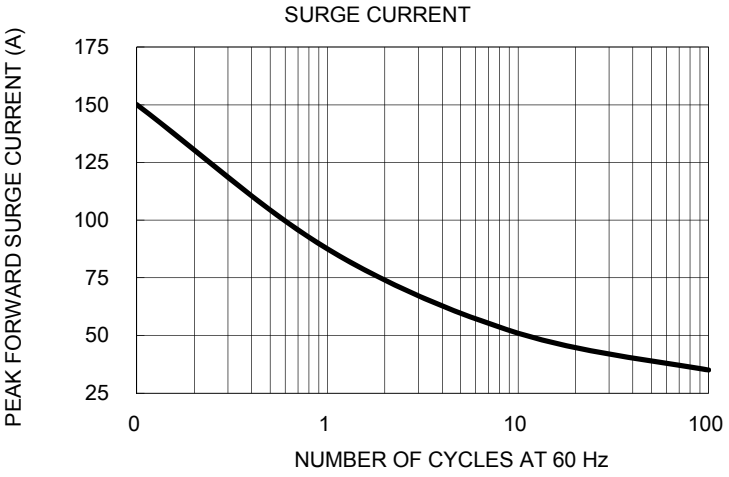


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

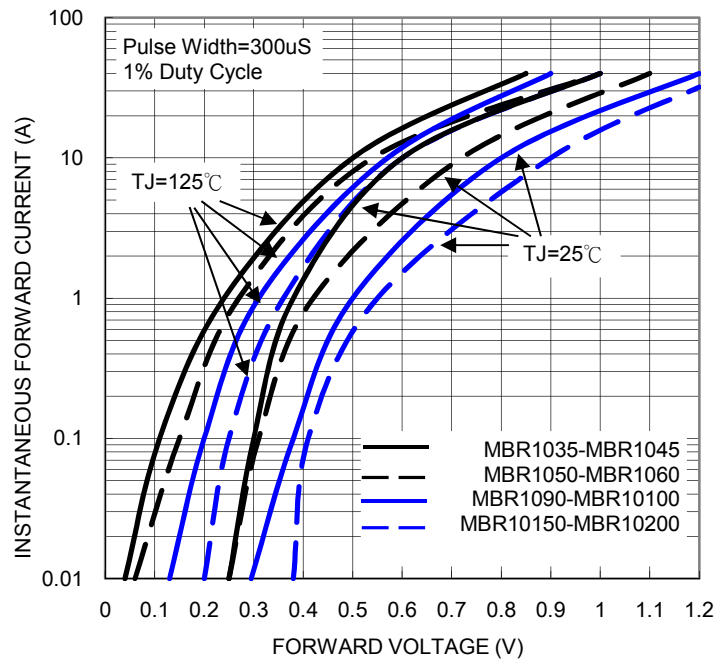


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

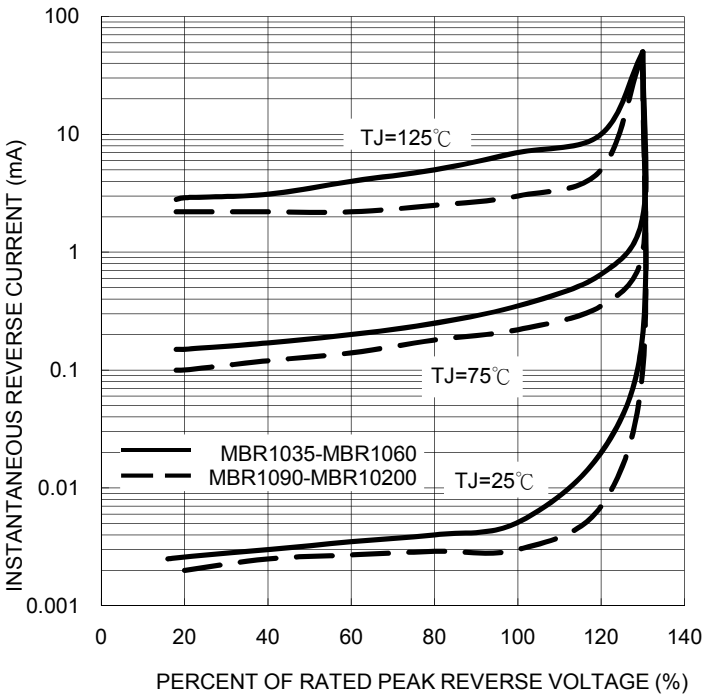


FIG. 5- TYPICAL JUNCTION CAPACITANCE



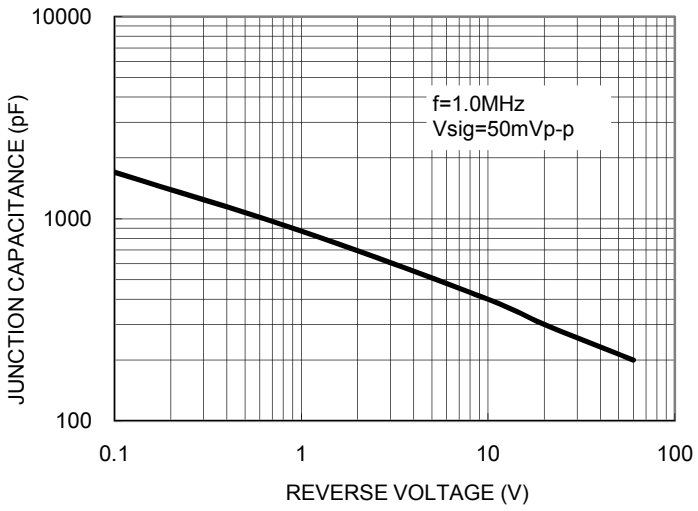


FIG. 6- TYPICAL TRANSIENT THERMAL CHARACTERISTIC

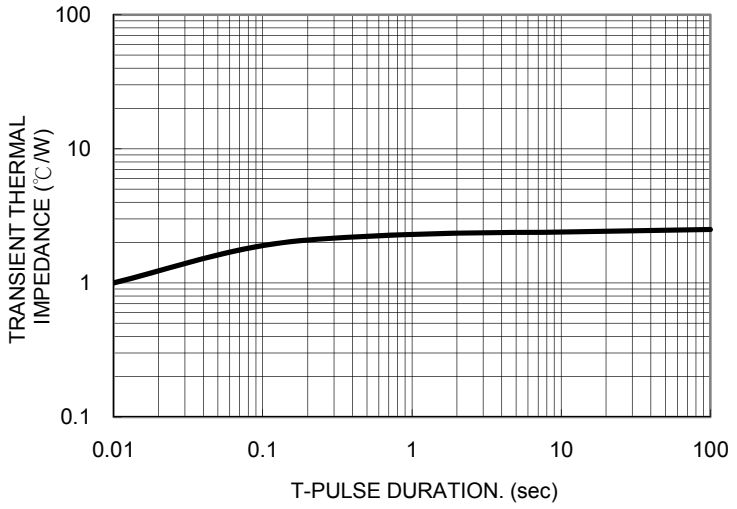


PACKAGE OUTLINE DIMENSIONS

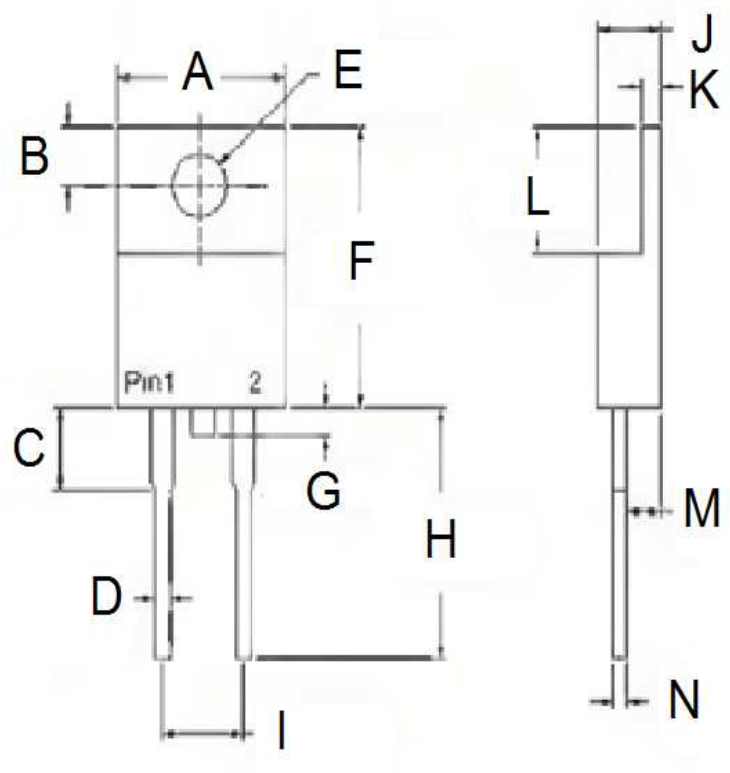

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	-	10.50	-	0.413
B	2.62	3.44	0.103	0.135
C	2.80	4.20	0.110	0.165
D	0.68	0.94	0.027	0.037
E	3.54	4.00	0.139	0.157
F	14.60	16.00	0.575	0.630
G	0.00	1.60	0.000	0.063
H	13.19	14.79	0.519	0.582
I	4.95	5.20	0.195	0.205
J	4.42	4.76	0.174	0.187
K	1.14	1.40	0.045	0.055
L	5.84	6.86	0.230	0.270
M	2.20	2.80	0.087	0.110
N	0.35	0.64	0.014	0.025

MARKING DIAGRAM



P/N	= Marking Code
G	= Green Compound
YWW	= Date Code
F	= Factory Code