


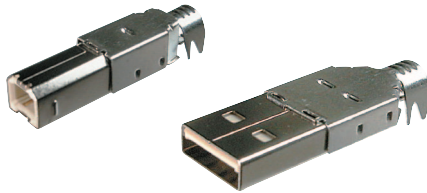

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

USB A + B, Konfektions-Version**USB A + B, Assembly-Type****Isolierkörper**PBT, Glasfaserverstärkt,
UL94V-0**Kontakte**

Messing

Nennspannung

30V AC

Nennstrom

1A

Isolationswiderstand1000M Ω min.**Kontaktwiderstand**30m Ω max.**Durchschlagsspannung**

750V AC

Betriebstemperatur

-55°C bis +105°C

InsulatorPBT, Glass fiber reinforced,
UL94V-0**Contacts**

Brass

Voltage rating

30V AC

Current rating










1A

Insulation resistance1000M Ω min.**Contact resistance**30m Ω max.**Withstanding voltage**

750V AC

Operating temperature

-55°C to +105°C



Bestellcode : **A - USBP - x - N**
 Ordercode :

Bitte „x“ durch die unten geeignete Optionen ersetzen
 Please replace „x“ with appropriate options listed below

1.

Ausführung

A - Bauform A
 B - Bauform B

Version

A - Type A
 B - Type B

Hauben für USB-Konfektions-Version
Hoods for USB-Assembly-Type
**Farbe**

Transparent

Material

ABS

Colour

Transparent

Material

ABS

Bestellcode : **A - USBPA - HOOD - N**
 Ordercode :

A - USBPB - HOOD - N

Type A

Type B

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powercords
Powersockets

MiniDIN

DIN4161x
HardmetricSockets + Strips
Jumper