
**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

| EDITION | DATE | REVISION RECORD | REVISION NO. | APPROVED |
|---|---|---|---|---|
| | | | | |

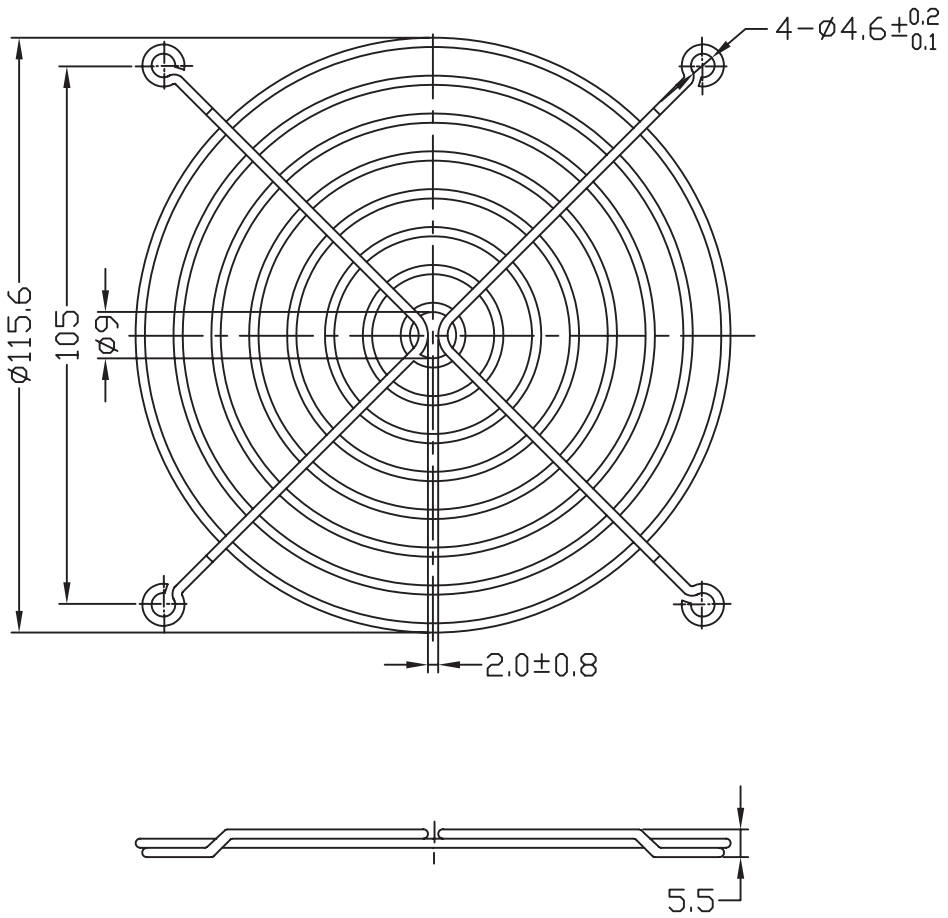


NOTES:
1.MATERIAL:C1008 BRIGHT BASIC WIRE.
2.FINISH:BRIGHT NICKEL CHROME.$Cr3^{+}$
3.(1)RINGS ARE ø1.8mm.
(2)RIBS ARE ø1.8mm.
4.WELD JOINTS TO WITHSTAND 88 LBS PULL FORCE.
5.SPACING BETWEEN RINGS TO BE EUQIDISTANT 5.56mm.
6.GENERAL TOLERANCE UNLESS NOTED:±0.5mm.
7.PART MEETS ø6.35mmPLUG GAUGE TEST.
8.UNIT:mm.

| APPROVED | CHECKED | DESIGNED | DRAWN | | MATERIAL | SEE NOTES | TITLE | FAN GUARD | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | SCALE 1/1.5 | FINISH | SEE NOTES | PART NO. | | 0 REV |
| | | | | DRAWING DATE | | | | | |