




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


PCB Mounting Precision Socket, Height 7 mm



Specification:

- 1) Contact Resistance: 20mΩ max. initial.
- 2) Dielectric Withstanding Voltage: 500V AC(rms) for 1 minute
- 3) Insulation Resistance: 1000MΩ min.
- 4) Pin Plating: Tin 150u"
- 5) Clip plating: Gold Flash
- 6) Pin length: 10.00 mm
- 7) Operating Temperature: 0°C ~ +85°C
- 8) Storage Temperature: -20°C ~ +70°C

ZL307-1x5




No. of Contacts in Row:

N = 1...40


Row:

- 1 – single
- 2 - dual

PCB Mounting Precision Socket, Height 7 mm

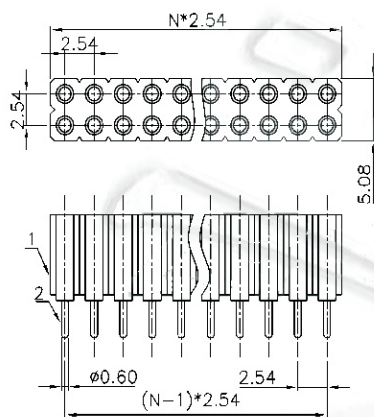

DUAL ROWS

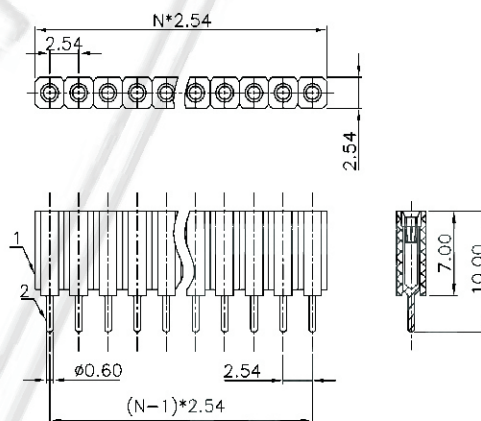

SINGLE ROW