




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

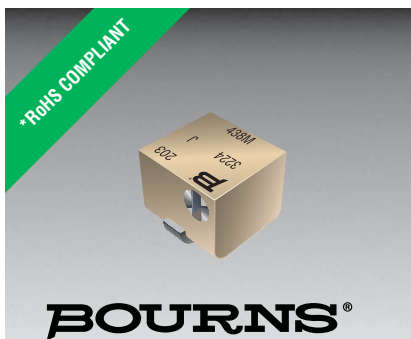

Features

- Surface Mount 4 mm Square / Multiturn Cermet / Industrial / Sealed
- Sealed to withstand board wash processing
- Pick and place centering design, with flush adjustment
- 4mm design meets EIA/EIAJ/IPC/VECI SMD standard trimmer footprint

- Low CRV - 1 %
- RoHS compliant* - see [processing information](#) on lead free surface mount trimmers

3224 - 4 mm SMD Trimpot® Trimming Potentiometer

Electrical Characteristics

Standard Resistance Range	10 to 2 megohm (see standard resistance table)
Resistance Tolerance	±10 % std.
Absolute Minimum Resistance	1 % or 2.0 ohms (whichever is greater)
Contact Resistance Variation	1 % or 3 ohms max.
Resolution	Essentially Infinite
Insulation Resistance	500 vdc. 100 megohms min.
Dielectric Strength	Sea Level 600 vac (1 minute)
Adjustment Angle	11 turns nom.

Environmental Characteristics

Power Rating (300 volts max.)	85 °C 0.25 watt 150 °C 0 watt
Temperature Range	-65 °C to +150 °C
Temperature Coefficient	±100 ppm/°C
Humidity	MIL-STD 202 Method 106 TRS ±2 %; IR 10 megohms
Vibration	20 G TRS±1 %; VRS ±1 %
Shock	100 G TRS ±1 %; VRS ±1 %
Load Life	@ 85 °C rated power 1,000 hours
TRS	3 ohms or 3 % (whichever is greater)
Rotational Cycling	200 cycles
TRS	3 ohms or 3 % (whichever is greater)
Thermal Shock	5 cycles TRS±2 %; VRS±1 %

Physical Characteristics

Mechanical Stop	Wiper idles
Torque	180 g-cm max.
Weight	Approximately 0.01 oz.
Marking	Manufacturer's code, resistance code and date code
Solderability	Per MIL-STD-202, Method 208
Wiper	50 % (Actual TR) ±10 %
Flammability	UL94V0
Pushover Strength	4.4 lbs. J, G W, X 1 lb.
Adjustment Tool	H-91


How To Order

Model	3224 J - 1 - 502 E
Style	
Standard or Modified	
Product Indicator	
-1=	IR Reflow (standard)
†-2=	Wave Solderable
-FW5=	.070 " ± .010 " Shaft Extension
-GJ4=	MSL 2a Packaging (for -1 only)
Resistance Code	
Embossed Tape Designator	
E =	Style J, G: 500 pcs./7 " reel (standard)
	Style W: 250 pcs./7 " reel (standard)
	Style X: 200 pcs./7 " reel (standard)
G =	Style J, G: 1500 pcs./13 " reel (standard)
	Style W: 1000 pcs./13 " reel (standard)
	Style X: 850 pcs./13 " reel (standard)
Blank =	Style J, G: 1500 pcs./13 " reel (FW5)
	Style W, X: 600 pcs./13 " reel (FW5)


Consult factory for other available options.
† -2 has a treated stainless steel shaft

Product Dimensions


3224J Side Adjust

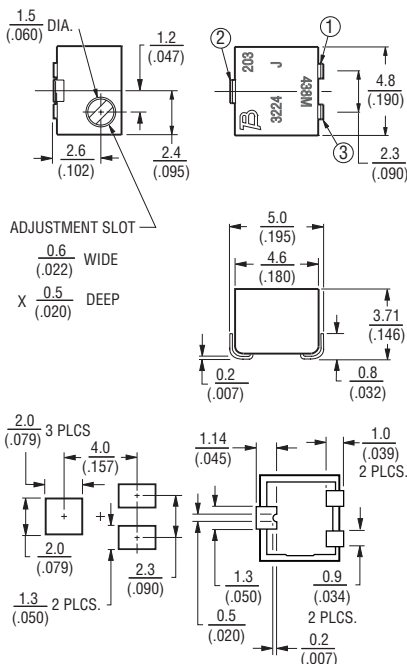


3224G Side Adjust

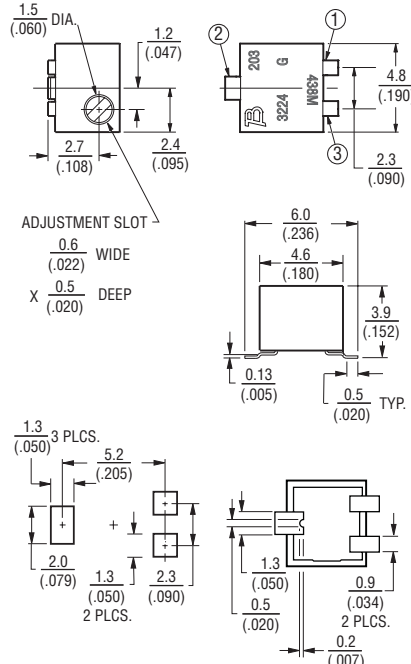

3224W Top Adjust

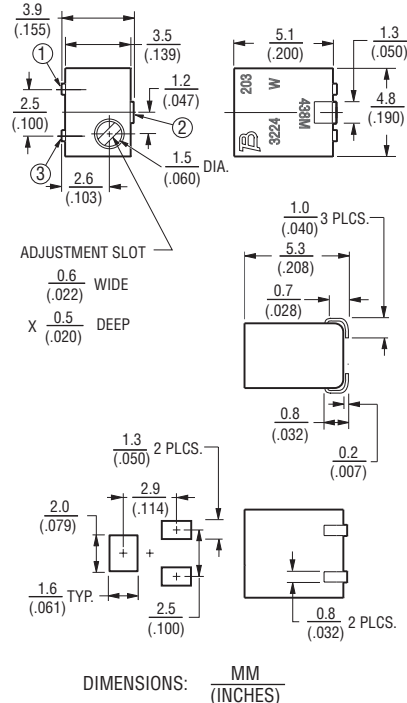

3224X Top Adjust

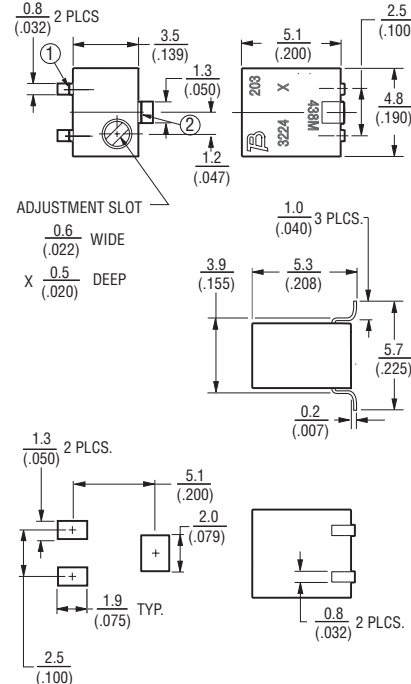

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.



Additional Features

- Top and side adjust styles
- J-hook, and gull-wing

3224 - Packaging Specifications


BOURNS®

J & G Styles

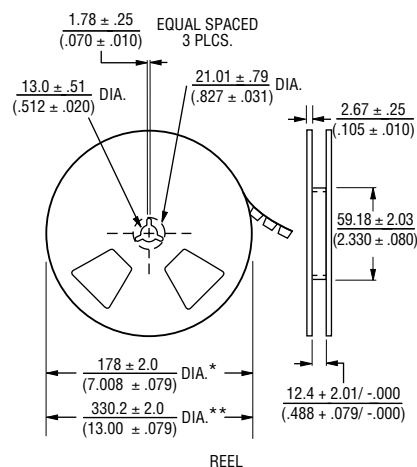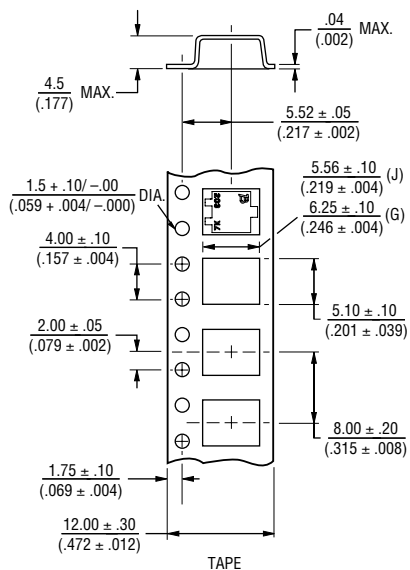


* Embossed Tape Designator "E"
 ** Embossed Tape Designator "G"
 (See How To Order chart for further information.)


Cover tape peel strength: Meets EIA specification 481.



W Style

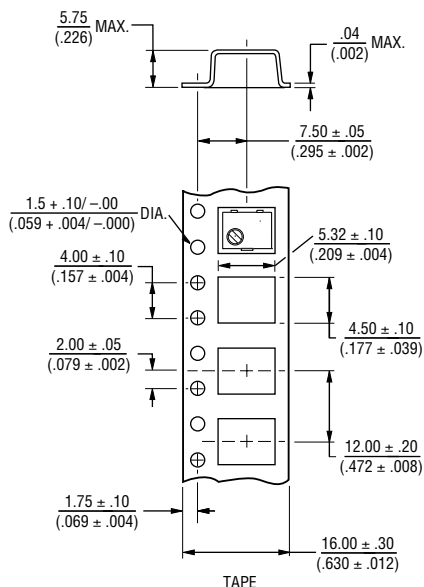


W & X Style Reel

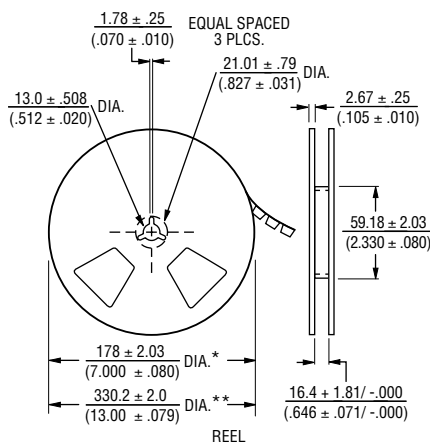

* Embossed Tape Designator "E"
 ** Embossed Tape Designator "G"
 (See How To Order chart for further information.)

Cover tape peel strength: Meets EIA specification 481.

X Style

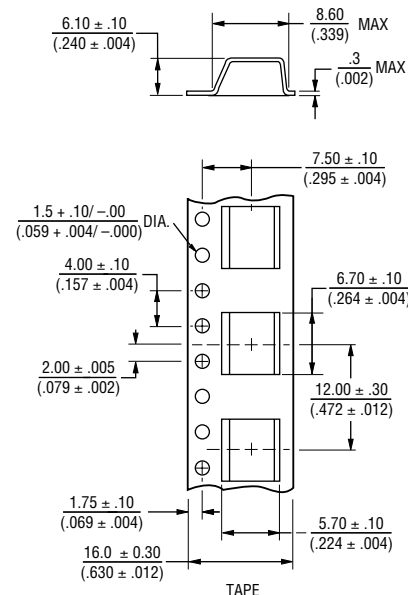

Standard Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105
2,000,000	205

Popular distribution values listed in boldface.
 Special resistances available.

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

TOLERANCES: $\pm \frac{0.25}{(.010)}$ EXCEPT WHERE NOTED

REV. 03/10

"Trimpot" is a registered trademark of Bourns, Inc.
 Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.