




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Number of contacts

6-64

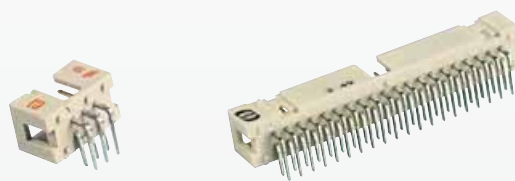Low-profile male header, angled solder pins


Identification	No. of contacts	Part No.	Drawing	Dimensions in mm
----------------	-----------------	----------	---------	------------------

Male header with angled solder pins

Length: 2.9 mm

6	09 18 506	323
10	09 18 510	323
14	09 18 514	323
16	09 18 516	323
20	09 18 520	323
26	09 18 526	323
34	09 18 534	323
40	09 18 540	323
50	09 18 550	323
60	09 18 560	323
64	09 18 564	323

No. of contacts	A	B	E
6	15.2	12.78	2.54 x 2 = 5.08
10	20.3	17.86	2.54 x 4 = 10.16
14	25.4	22.94	2.54 x 6 = 15.24
16	27.9	25.48	2.54 x 7 = 17.78
20	33.0	30.56	2.54 x 9 = 22.86
26	40.6	38.18	2.54 x 12 = 30.48
34	50.8	48.34	2.54 x 16 = 40.64
40	58.4	55.96	2.54 x 19 = 48.26
50	71.3	68.66	2.54 x 24 = 60.96
60	84.0	81.36	2.54 x 29 = 73.66
64	89.1	86.44	2.54 x 31 = 78.74




Solder pins for 0.9 mm dia. hole

Male header with angled solder pins

Length: 4.5 mm

6	09 18 506	321*
10	09 18 510	321*
14	09 18 514	321*
16	09 18 516	321*
20	09 18 520	321*
26	09 18 526	321*
34	09 18 534	321*
40	09 18 540	321*
50	09 18 550	321*
60	09 18 560	321*
64	09 18 564	321*

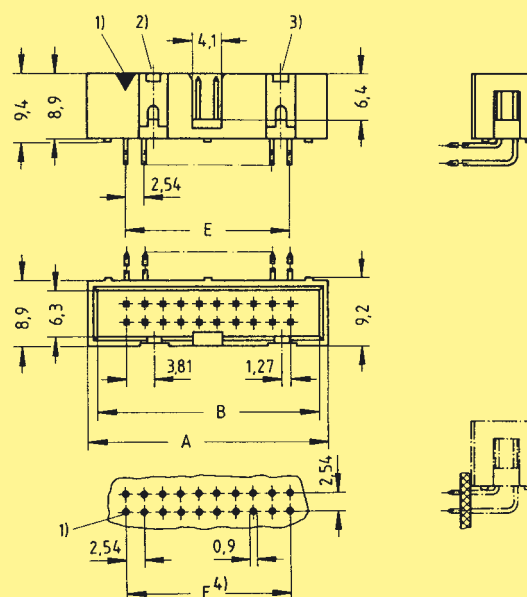

For performance level 3 please specify digit 7
 For performance level 2 please specify digit 6
 > 0.76 µm Au (30 µinch) on request


7
 6
 5 *

Identification	No. of contacts	Part No.	Drawing	Dimensions in mm
----------------	-----------------	----------	---------	------------------

Locking lever for female connector with strain relief

in conjunction with low-profile male header

When the security of latching is required and space is a premium, these locking levers can be fitted onto the strain relief of the HARTING female connector.

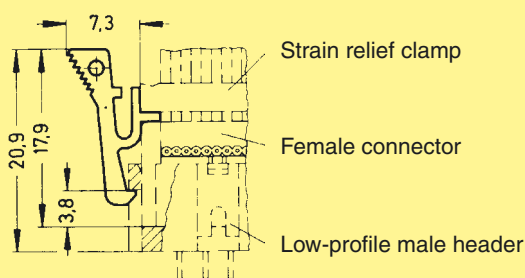09 18 000 9905⁵⁾

Strain relief clamp

Female connector

Low-profile male header

1) Contact number 1

2) No polarization slot for 6, 10 or 14 way male header

3) No polarization slot for 6 way male header

4) Pitch tolerance: ± 0.1

* Not normally kept in stock

5) Order 2 per female connector