



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.




reference

2J510F - flexible

mounting position	ON GLASS
nominal impedance	50 Ohms
frequency	AMPS 824-894MHz / GSM 900, 1800 MHz PCN 1,9GHz / UMTS 2,1GHz/ Bluetooth 2,4GHz
polarization	VERTICAL
gain	2.15 dBi
vswr	<1,5/2
power handling	25W
cable	2.5m RG174
connector	FME Female
housing size	11- 15mm x 123 mm
working temperature	-40°C to +85°C

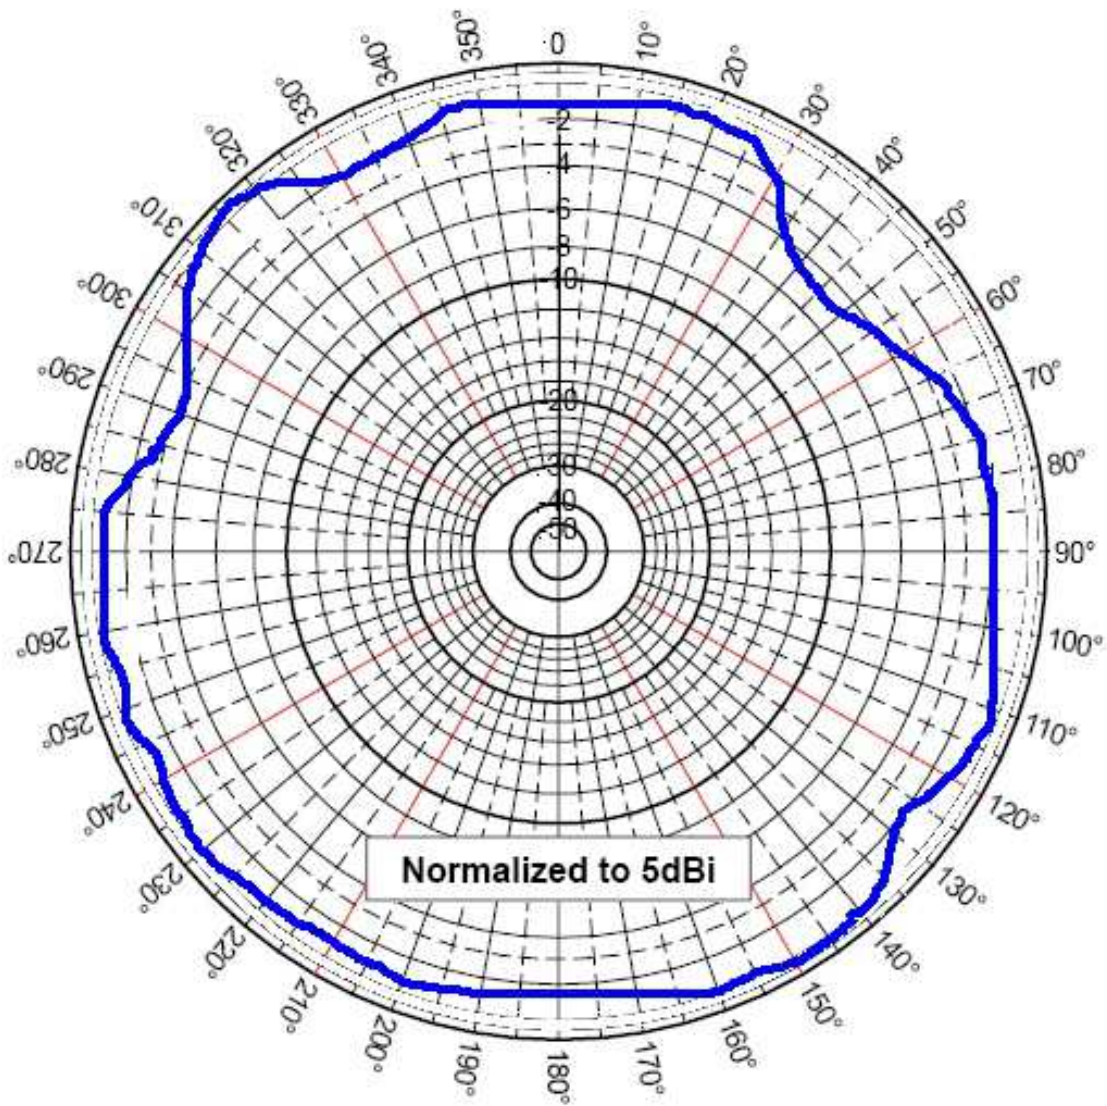

Azimuthal Pattern (X, Y or E-Plane)

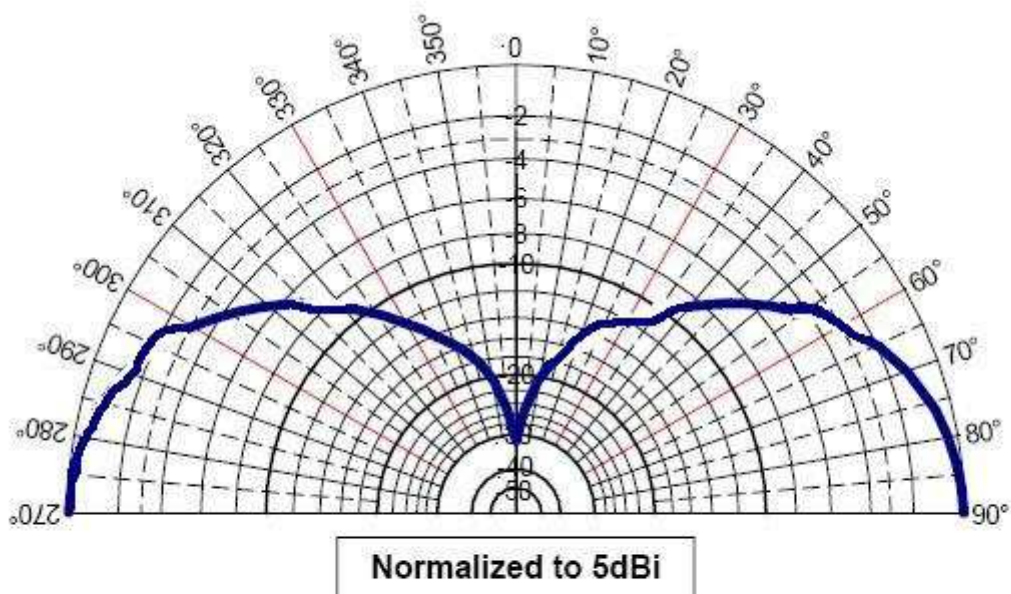

Elevation Pattern (Z, Y or H-Plane)

