**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.




# BUELA 20 K gelb/yellow

Industrial Connectors:Measuring and Testing Equipment:Plugs:4 mm system

| Product description | |
|---|---|
| Description | Multiple-spring wire plug, shatter-proof, flexible insulating sleeve with transverse hole. The tapering sleeve end also serves as kinking protection for the lead.Screw connection up to maximum cable cross-section of 1.5 mm². Nickel-plated brass contact material. |
| Type | BUELA 20 K gelb/yellow |
| Order No. | 930 726-103 |
| System | 4 mm System |
| Housing Color | yellow |
| Other standard types | black color,<br>order no. 930 726-100;<br>red color,<br>order no. 930 726-101;<br>blue color,<br>order no. 930 726-102;<br>green color,<br>order no. 930 726-104 |

**Drawing**

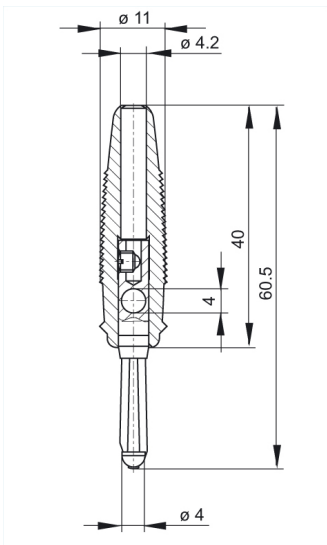


| Technical data | |
|---|---|
| Pin dimensions | 4 mm |
| Type of contact | pin (spring loaded) |
| Type of termination | screw |
| Rated voltage | DC 60 V |
| Rated current | 16 A |
| Contact resistance | 3 mOhm |
| **Material** | |
| Contact material | brass |
| Contact surface material | nickel-plated |

| | |
|---|---|
| Housing material | PVC-P |
| **Environmental conditions** | |
| Temperature range | -25 °C to +70 °C |
| **Inflammability class** | |
| Housing | 94 V-2 |