EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

TS7800 series

3-Terminal Fixed Positive Voltage Regulator

TO-220 **ITO-220**



Pin assignment:
1. Input
2. Ground
3. Output

(Heatsink surface connected to Pin 2)

Voltage Range 5V to 24V
Output Current up to 1A

General Description

These voltage regulators are monolithic integrated circuits designed as fixed-voltage regulators for a wide variety of applications including local, on-card regulation. These regulators employ internal current limiting, thermal shutdown, and safe-area compensation. With adequate heatsink they can deliver output currents up to 1 ampere.


Although designed primarily as a fixed voltage regulator, these devices can be used with external components to obtain adjustable voltages and currents.

This series is offered in 3-pin TO-220, ITO-220 package.

Features

- ✧ Output current up to 1A
- ✧ No external components required
- ✧ Internal thermal overload protection
- ✧ Internal short-circuit current limiting
- ✧ Output transistor safe-area compensation
- ✧ Output voltage offered in 4% tolerance

Standard Application

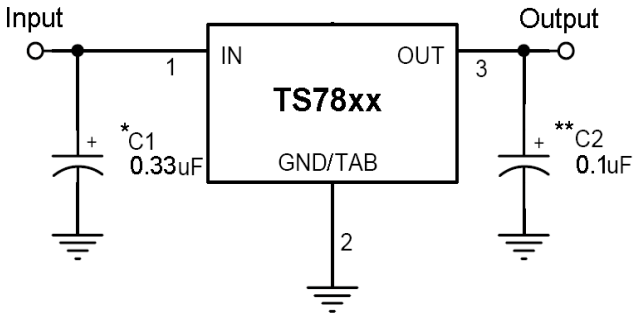

A common ground is required between the input and the output voltages. The input voltage must remain typically 2.0V above the output voltage even during the low point on the Input ripple voltage.

XX = these two digits of the type number indicate voltage.

* = Cin is required if regulator is located an appreciable distance from power supply filter.

** = Co is not needed for stability; however, it does improve transient response.

Ordering Information

Part No.	Operating Temp.	Package
TS78xxCZ	0~ +125°C	TO-220
TS78xxCI		ITO-220

Note: Where xx denotes voltage option.

Absolute Maximum Rating

Input Voltage		Vin *	35	V
Input Voltage		Vin **	40	V
Power Dissipation	TO-220	Without heatsink	2	W
	TO-220	With heatsink	15	
	ITO-220		10	
Operating Junction Temperature Range		T_J	0 ~ +125	°C
Storage Temperature Range		T_{STG}	-65 ~ +150	°C

Note : * TS7805 to TS7818
** TS7824
*** Follow the derating curve

TS7805 Electrical Characteristics

(Vin=10V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output voltage	Vout	Tj=25°C		4.80	5	5.20	V
		7.5V≤Vin≤20V, 10mA≤Iout≤1A, PD≤15W		4.75	5	5.25	
Line Regulation	REGline	Tj=25°C	7.5V≤Vin≤25V	--	3	100	mV
			8V≤Vin≤12V	--	1	50	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	15	100	
			250mA≤Iout≤750mA	--	5	50	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.2	8	mA
Quiescent Current Change	ΔIq	7.5V≤Vin≤25V		--	--	1.3	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	40	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 8V≤Vin≤18V		62	78	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	17	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	750	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-0.6	--	mV/ °C

TS7806 Electrical Characteristics

(Vin=11V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		5.75	6	6.25	V
		8.5V≤Vin≤21V, 10mA≤Iout≤1A, PD≤15W		5.7	6	6.3	
Line Regulation	REGline	Tj=25°C	8.5V≤Vin≤25V	--	5	120	mV
			9V≤Vin≤13V	--	1.5	60	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	14	120	
			250mA≤Iout≤750mA	--	4	60	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.3	8	mA
Quiescent Current Change	ΔIq	8.5V≤Vin≤25V		--	--	1.3	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	45	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 9V≤Vin≤19V		59	75	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	19	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	550	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-0.7	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7808 Electrical Characteristics

(Vin=14V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		7.69	8	8.32	V
		10.5V≤Vin≤23V, 10mA≤Iout≤1A, PD≤15W		7.61	8	8.40	
Line Regulation	REGline	Tj=25°C	10.5V≤Vin≤25V	--	6	160	mV
			11V≤Vin≤17V	--	2	80	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	12	160	
			250mA≤Iout≤750mA	--	4	80	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.3	8	mA
Quiescent Current Change	ΔIq	10.5V≤Vin≤25V		--	--	1	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	52	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 11V≤Vin≤21V		56	72	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	16	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	450	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-0.8	--	mV/ °C

TS7809 Electrical Characteristics

(Vin=15V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		8.65	9	9.36	V
		11.5V≤Vin≤23V, 10mA≤Iout≤1A, PD≤15W		8.57	9	9.45	
Line Regulation	REGline	Tj=25°C	11.5V≤Vin≤26V	--	6	180	mV
			12V≤Vin≤17V	--	2	90	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	12	180	
			250mA≤Iout≤750mA	--	4	90	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.3	8	mA
Quiescent Current Change	ΔIq	11.5V≤Vin≤26V		--	--	1	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	52	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 12V≤Vin≤22V		55	72	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	16	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	450	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7810 Electrical Characteristics

(Vin=16V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		9.6	10	10.4	V
		12.5V≤Vin≤25V, 10mA≤Iout≤1A, PD≤15W		9.5	10	10.5	
Line Regulation	REGline	Tj=25°C	12.5V≤Vin≤28V	--	7	200	mV
			13V≤Vin≤17V	--	2	100	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	12	200	
			250mA≤Iout≤750mA	--	4	100	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.3	8	mA
Quiescent Current Change	ΔIq	12.5V≤Vin≤28V		--	--	1	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	70	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 13V≤Vin≤23V		55	71	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	18	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	400	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

TS7812 Electrical Characteristics

(Vin=19V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		11.53	12	12.48	V
		14.5V≤Vin≤27V, 10mA≤Iout≤1A, PD ≤15W		11.42	12	12.60	
Line Regulation	REGline	Tj=25°C	14.5V≤Vin≤30V	--	10	240	mV
			15V≤Vin≤19V	--	3	120	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	12	240	
			250mA≤Iout≤750mA	--	4	120	
Quiescent Current	Iq	Tj=25°C, Iout=0		--	4.3	8	mA
Quiescent Current Change	ΔIq	14.5V≤Vin≤30V		--	--	1	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	75	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 15V≤Vin≤25V		55	71	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	18	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	350	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7815 Electrical Characteristics

(Vin=23V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		14.42	15	15.60	V
		17.5V≤Vin≤30V, 10mA≤Iout≤1A, PD ≤15W		14.28	15	15.75	
Line Regulation	REGline	Tj=25°C	17.5V≤Vin≤30V	--	12	300	mV
			18V≤Vin≤22V	--	3	150	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	12	300	
			250mA≤Iout≤750mA	--	4	150	
Quiescent Current	Iq	Tj=25°C, Iout=0		--	4.3	8	mA
Quiescent Current Change	ΔIq	17.5V≤Vin≤30V		--	--	1	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	90	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 18V≤Vin≤28V		54	70	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	19	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	230	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

TS7818 Electrical Characteristics

(Vin=27V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		17.30	18	18.72	V
		21V≤Vin≤33V, 10mA≤Iout≤1A, PD ≤15W		17.14	18	18.90	
Line Regulation	REGline	Tj=25°C	21V≤Vin≤33V	--	15	360	mV
			22V≤Vin≤26V	--	5	180	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	12	360	
			250mA≤Iout≤750mA	--	4	180	
Quiescent Current	Iq	Tj=25°C, Iout=0		--	4.5	8	mA
Quiescent Current Change	ΔIq	21V≤Vin≤33V		--	--	1	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	110	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 21V≤Vin≤31V		54	70	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	22	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	200	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7824 Electrical Characteristics

(Vin=33V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		23.07	24	24.96	V
		27V≤Vin≤38V, 10mA≤Iout≤1A, PD ≤15W		22.85	24	25.20	
Line Regulation	REGline	Tj=25°C	27V≤Vin≤38V	--	18	480	mV
			28V≤Vin≤32V	--	6	240	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1A	--	12	480	
			250mA≤Iout≤750mA	--	4	240	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.6	8	mA
Quiescent Current Change	ΔIq	27V≤Vin≤38V		--	--	1	
		10mA≤Iout≤1A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	170	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 27V≤Vin≤37V		54	70	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	28	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	150	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1.5	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

Electrical Characteristics Curve

FIGURE 1 - Worst Case Power Dissipation v.s. Ambient Temperature

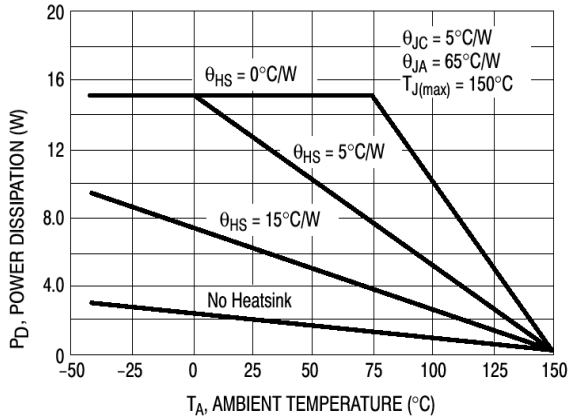


FIGURE 2 - Peak Output Current v.s. Input-Output Differential Voltage

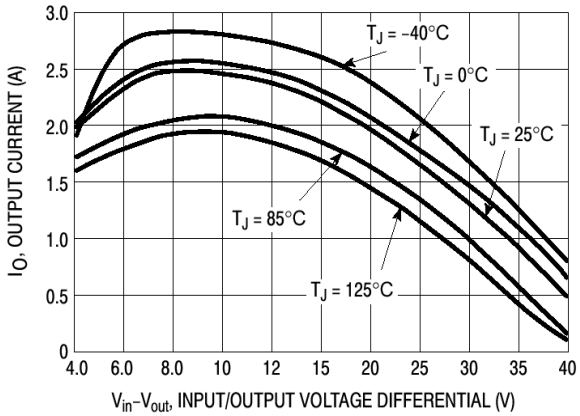


FIGURE 3 – Quiescent Current v.s. Junction Temperature

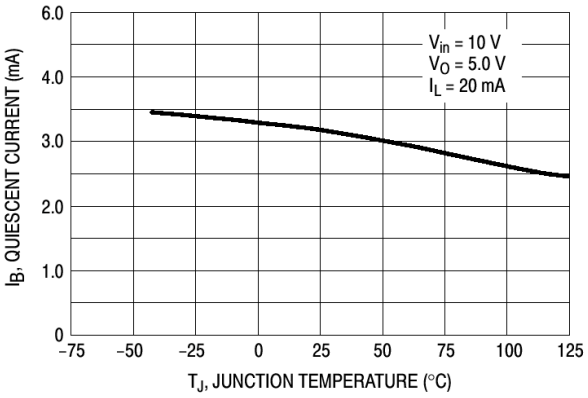


FIGURE 4 – Input Output Differential v.s. Junction Temperature

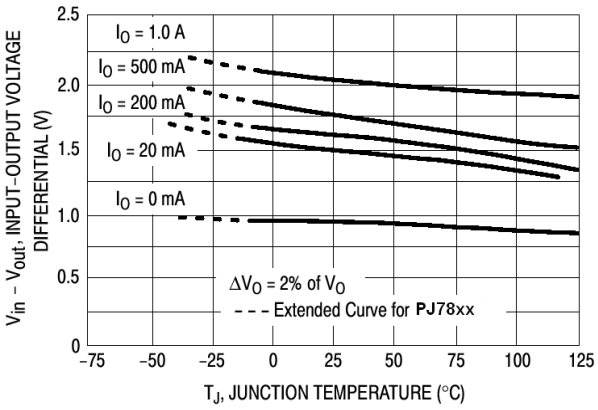


FIGURE 5 – Output Voltage v.s. Junction Temperature


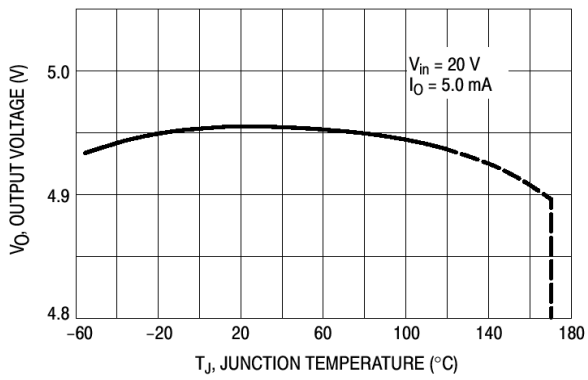


FIGURE 6 – Output Impedance v.s. Output Voltage

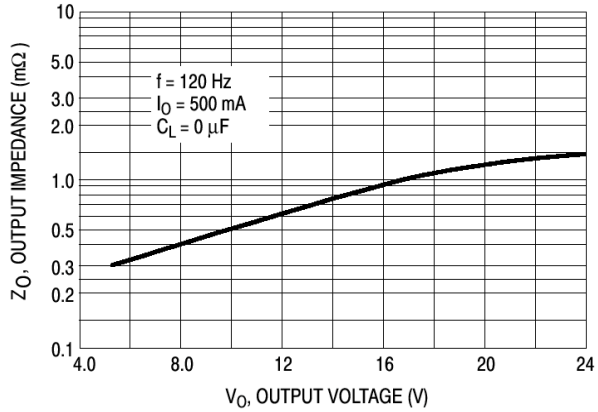

Electrical Characteristics Curve

FIGURE 7 – Ripple Rejection v.s. Output Voltage



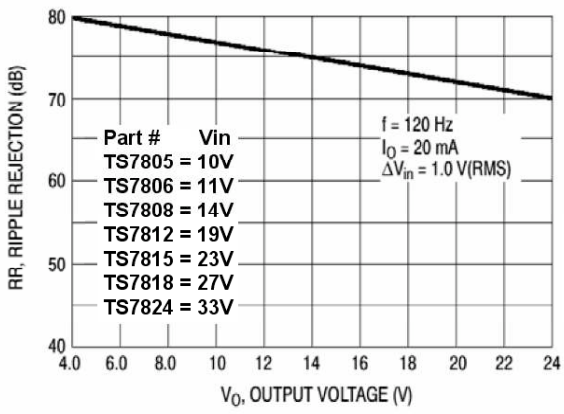


FIGURE 8 – Ripple Rejection v.s. Frequency

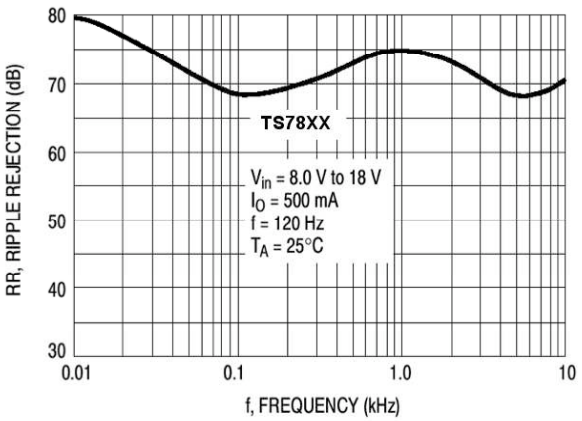


TO-220 Mechanical Drawing

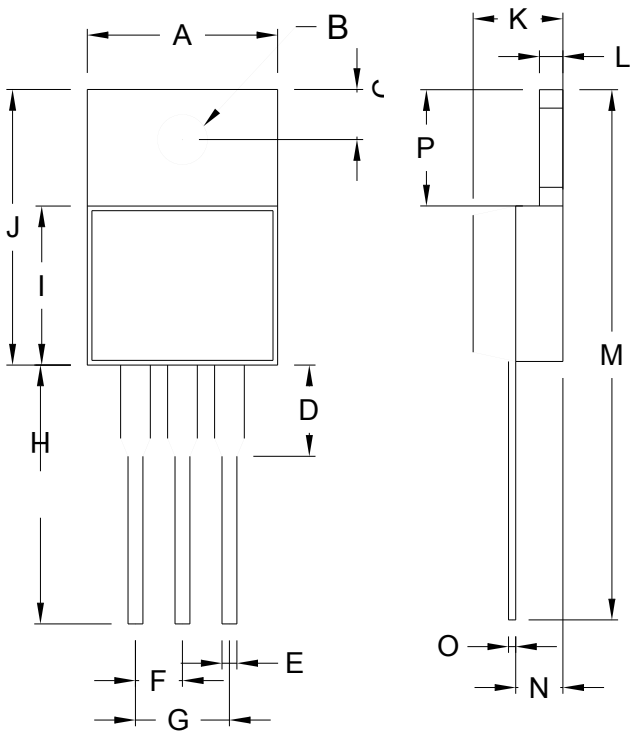

TO-220 DIMENSION			
DIM	MILLIMETERS		
	MIN	MAX	TYP.
A	10.000	10.300	10.100
B	3.350	4.350	3.850
C	2.500	2.900	2.750
D	2.000	4.500	2.600
E	0.500	1.000	0.710
F	2.345	2.715	2.540
G	4.690	5.430	5.080
H	12.700	14.732	14.000
I	8.382	9.017	8.500
J	14.224	16.510	15.000
K	3.556	4.826	4.520
L	0.800	1.397	1.270
M	27.700	29.620	29.000
N	2.032	2.921	2.670
O	0.255	0.610	0.380
P	5.842	6.858	6.500

ITO-220 Mechanical Drawing

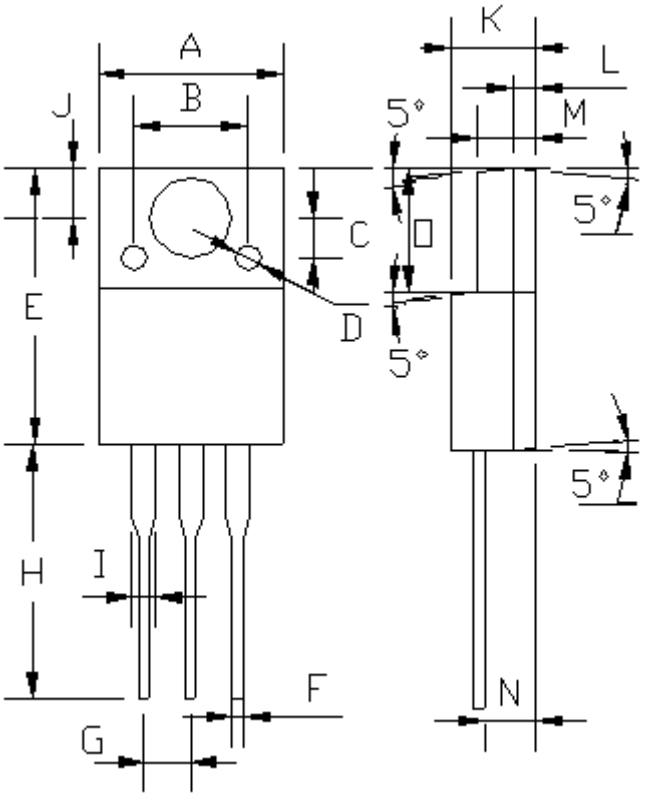

ITO-220 DIMENSION			
DIM	MILLIMETERS		
	MIN	MAX	TYP.
A	9.97	10.07	10.00
B	6.50(typ.)		6.50
C	2.20(typ.)		2.20
D	¡Ó1.40(typ.)		¡Ó1.40
E	15.00	15.20	15.15
F	0.55	0.70	0.60
G	2.35	2.73	2.55
H	13.35	13.55	13.40
I	1.11	1.45	1.20
J	2.60	2.80	2.70
K	4.49	4.50	4.50
L	1.15(typ.)		1.15
M	3.05	3.15	3.10
N	2.60	2.80	2.70
O	6.55	6.65	6.60