



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

WR8861,62,63,65

29*Wristband(WR8861-3.5)

RFID WRISTBAND


WATER PROOF AND SHOWER PROOF WRISTBAND OF VARIOUS DESIGNS & COLOURS



WR8861,8862,8863,8865 RFID Wristband Specification

Model No.	WR8861	WR8862	WR8863	WR8865
Reading Distance	80mm	60mm	70mm	80mm
Base on GK4001 chip, with EM9917 reader				
Operating temperature	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C
Storage temperature	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C
Material	ABS+PVC	ABS+PVC	PC+PVC	PC+PVC
Water proof	Y	Y		
Shower proof			Y	Y
Technology				
GK4001 (125KHz, 64bit, R/O)	Y	Y	Y	Y
H4102 (125KHz, 64bit, R/O)	Y	Y	Y	Y
I-Code SLI (13.56MHz, 1024bit, R/W)	Y	Y	Y	Y
Mifare S50 (13.56MHz, 1KByte, R/W)	Y	Y	Y	Y
Temic E5557 (125KHz, 330bit, R/W)	Y	Y	Y	Y
Hitag 1 (125KHz, 2048bit, R/W)	Y	Y	Y	Y
Hitag 2 (125KHz, 256bit, R/W)	Y	Y	Y	Y
Legic 256 (13.56MHz, 256Byte, R/W)	Y	Y	Y	Y

Dimension: (unit: mm)

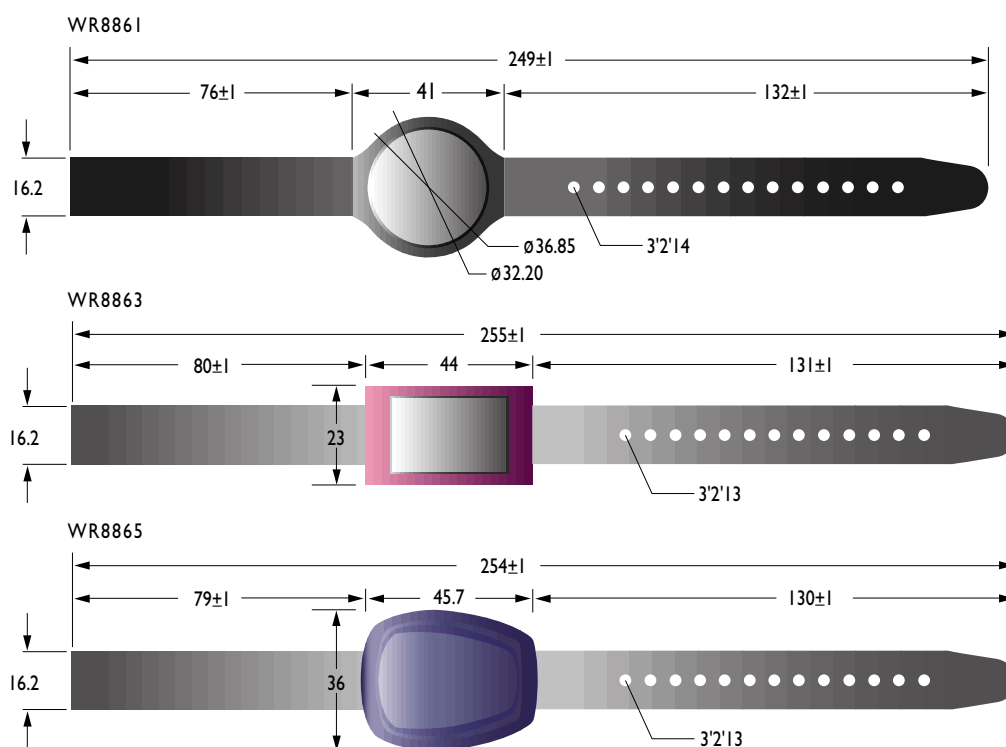

Application:

- Membership expenditure management such as: Health Club ,Golf Club or Swimming Club members.
- Membership rental management such as yachting, sports, etc.