
EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

RGB-75

Mini-Coaxial shielded plaited cable



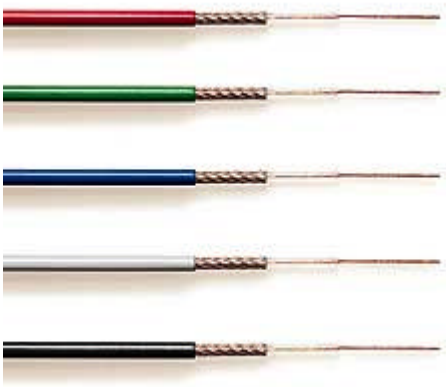

Technical characteristics:	
Cond Number Nominal Section	1x75 Ohm
Formation	10 x 0,10
External Dimension (mm)	2,8
External core (mm)	1,5
Conductor Resistance Ohm/Km ±5%	210
Operative Temperature (°C)	-15°/ +70°
Capacity (pF/mt) core/shield	67
Voltage V	1500
Impedance Ohm	75
Attenuation db/100 mt 50Mhz	19,5
Attenuation db/100 mt 100Mhz	28,5
Attenuation db/100 mt 200Mhz	35,6
Attenuation db/100 mt 400Mhz	60,0
Attenuation db/100 mt 860Mhz	90,0
Spool or Reel	100
Spool kind	M
Weight Kg	1,1

Description:

Mini-Coaxial shielded plaited cable
100% shielded - tinned copper
Stranded conductor in red copper
Conductor insulation in PEE
Sheath in PVC
Sheath colour: red, green, blue, white, black
Velocity of propagation 66%

Cable for video frequency

Available colours:

- Red
- Green
- Blue
- White
- Black