



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

1 2 3 4 5 6 7 8

A

B

C



D

E



F

G

H

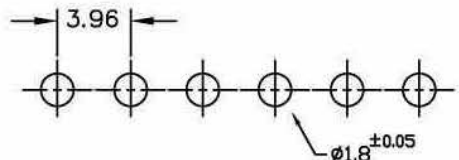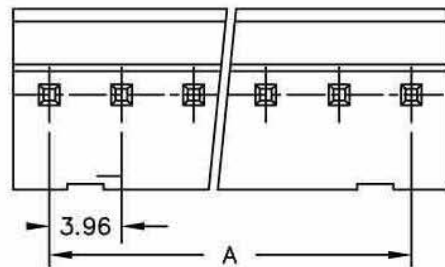

PCB LAYOUT COMPONENT SIDE

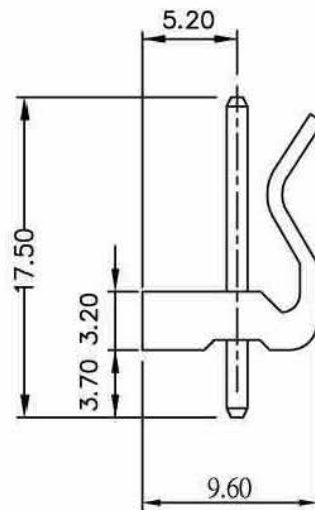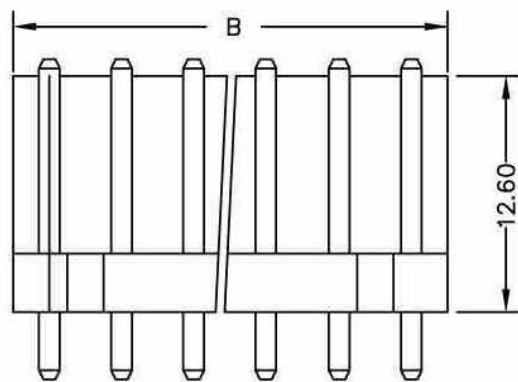

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC
Voltage Rating: 250V AC, DC
Operating Temp.: -25°C ~ +85°C
Insulation Resistance: 1000MΩ/ min.
Dielectric Withstanding Voltage: 1500V AC/ min.
Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2

Poles	Dimension mm (in.)	
	A	B
2	3.96	8.00
3	7.92	12.00
4	11.88	15.90
5	15.84	20.00
6	19.80	24.00
7	23.76	27.90
8	27.72	31.70
9	31.86	35.80
10	35.64	39.90
11	39.60	43.90
12	43.56	47.80
13	47.52	51.80
14	51.48	55.70
15	55.44	59.80
16	59.40	63.80

Gold Star Connectors Co., Ltd.

UNIT

SCALE

PART NAME

MM

WAFER 180° 3,96mm

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2005/08/31

DRAWING.

APPROVED

kevin

NCW396-xxS

A

1 2 3 4 5 6 7 8