






EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



15EDGK-3.5
15EDGK-3.81

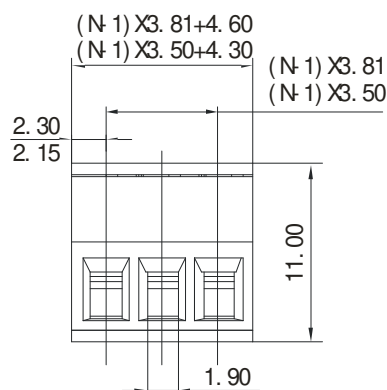

A 向视图

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

8A

28-16AWG

AC2000V/1Min

IEC

250V

7A

0.5-1.5mm²

Mechanical

Torque

0.2Nm(1.7Lb-In)

Ambient temperature

-40℃~+105℃

Strip length

7mm

Dimensions

Pitch

3.5mm(.138") 3.81mm(.150")

Poles

2P-24P

Material

Housing

PA66,UL94V-0

Screws

M2,Steel,Cr³+Zn-plated


Contact

Phosphor bronze

Cage

Brass,Ni-plated

HOW TO ORDER :





Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White



DEGSON ELECTRONICS CO., LTD.

NAME

15EDGK-3.5, 15EDGK-3.81