




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

NX Plugs, Cable Mount, 2.0 mm Pitch

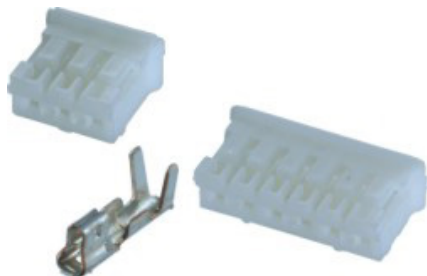

Specification:

- 1) Rated Voltage: 100V AC/DC
- 2) Rated Current: 1A
- 3) Withstand Voltage: 800V AC/1 min.
- 4) Insulation Resistance: 1000 M Ω min.
- 5) Material Insulation: Nylon 66 (UL94V-0)
- 6) Temperature Range: -25°C ~ +95°C




NXG-02

No. of ways

NX Plugs, Cable Mount

No of ways	Dimension mm	
	A	B
2	2.0	5.8
3	4.0	7.8
4	6.0	9.8
5	8.0	11.8
6	10.0	13.8
7	12.0	15.8
8	14.0	17.8
9	16.0	19.8
10	18.0	21.8
11	20.0	23.8
12	22.0	25.8
13	24.0	27.8
14	26.0	29.8
15	28.0	31.8
16	30.0	33.8

No of ways	Dimension mm	
	A	B
2	2.0	5.8
3	4.0	7.8
4	6.0	9.8
5	8.0	11.8
6	10.0	13.8
7	12.0	15.8
8	14.0	17.8
9	16.0	19.8
10	18.0	21.8
11	20.0	23.8
12	22.0	25.8
13	24.0	27.8
14	26.0	29.8
15	28.0	31.8
16	30.0	33.8

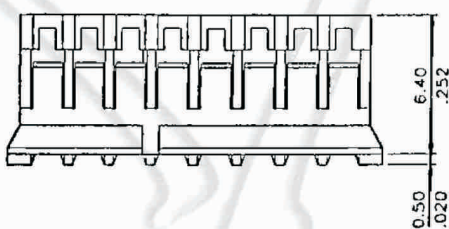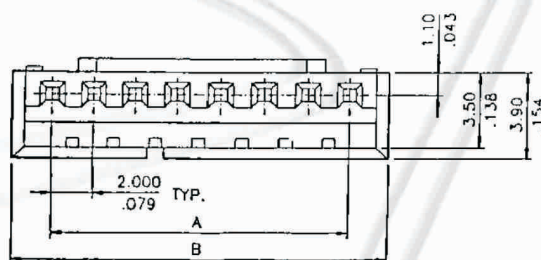

NX Plugs, Cable Mount, 2.0 mm Pitch

Specification Terminal **NXG-T**:

- 1) Material: Phos. Bronze
- 2) Thickness: 0.2 mm
- 3) Plating: Tin
- 4) Wire Range: Suitable for AWG#22-28

