EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		

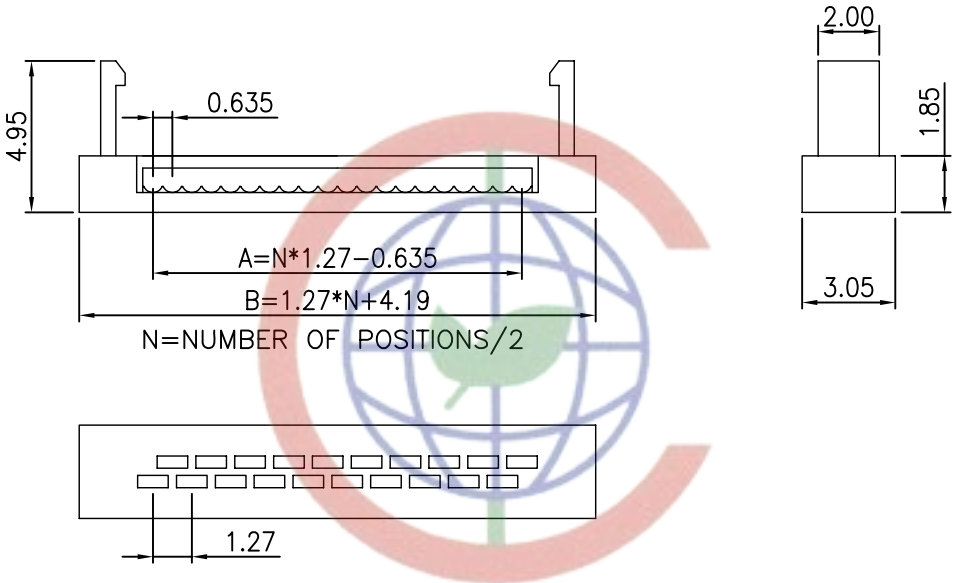

COVER

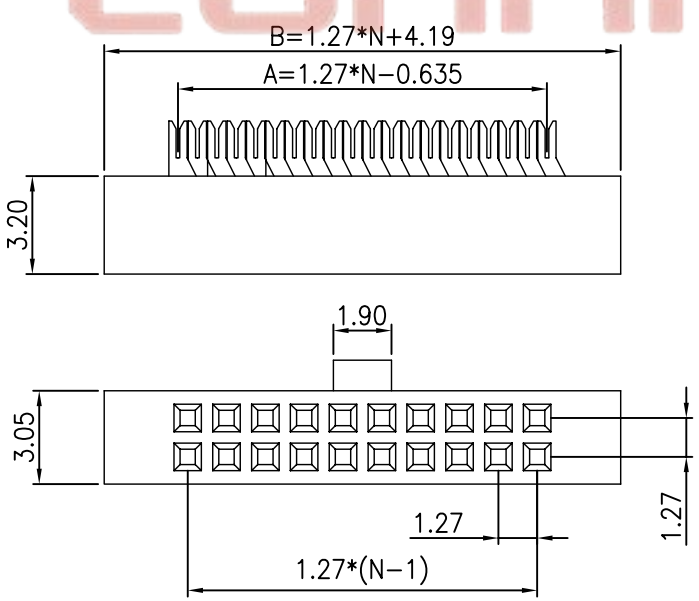

HOUSING

NOTES:

1. MATERIAL
   1.1 INSULATOR:THERMOPLASTIC(UL 94V−0).
   1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
   2.1 TEMPERATURE RANGE:−40°C~+105°C.
   2.2 CONTACT RESISTANCE:20mΩ max.
   2.3 INSULATION RESISTANCE:1000MΩ min.
   2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PACKING: PVC TRAY.
4. PRODUCT NUMBER CODE:
   DS1017−01− X X X X

CONTACT PLATING
8: FULL GOLD FLASH
2: NICKEL + GOLD FLASH
6: FULL Tin

POLARIZATION
A: W/
B: W/O

STRAIN RELIEF
N: W/O

No. OF CONTACTS
10 12 14 16 20 26 30 34
40 44 50 60 68 80 100

SERIES No.
DS1017

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1017−01−XXXX		

PROJECTION		TITLE	IDC SOCKET PITCH 1.27mm WITH 0.635mm FLAT CABLE
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1017−01 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

CONNFLY
Tel:86−574−
Fax:86−574−
E−mail:sale
Http://www
Add:East
Town
P.C.:75335