
EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.


ACCORD CO., LTD.

GENERAL SPECIFICATION

- Contact rating : 20mA, 24VDC
- LED Forward Current : 240mA
- LED Contact rating : Vmax=2.7V,Vnom=2.1V
- Contact resistance : 200 ohm max
- Life : 2,000,000 cycles per key
- Operating Temperature : -20°C to +60°C
- Storage Temperature : -40°C to +65°C

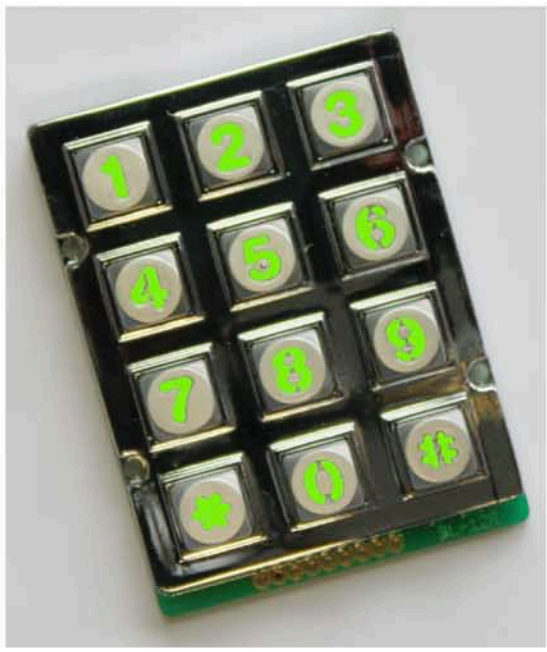


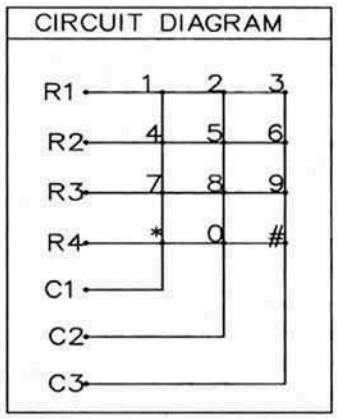

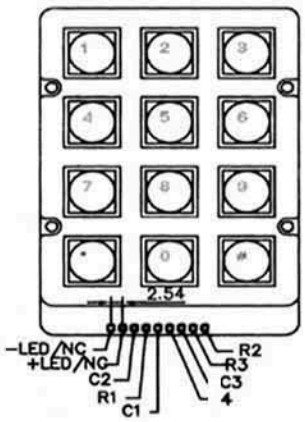

AK-207-N-SSL-WP-MM-DS

" RoHS Compliant "

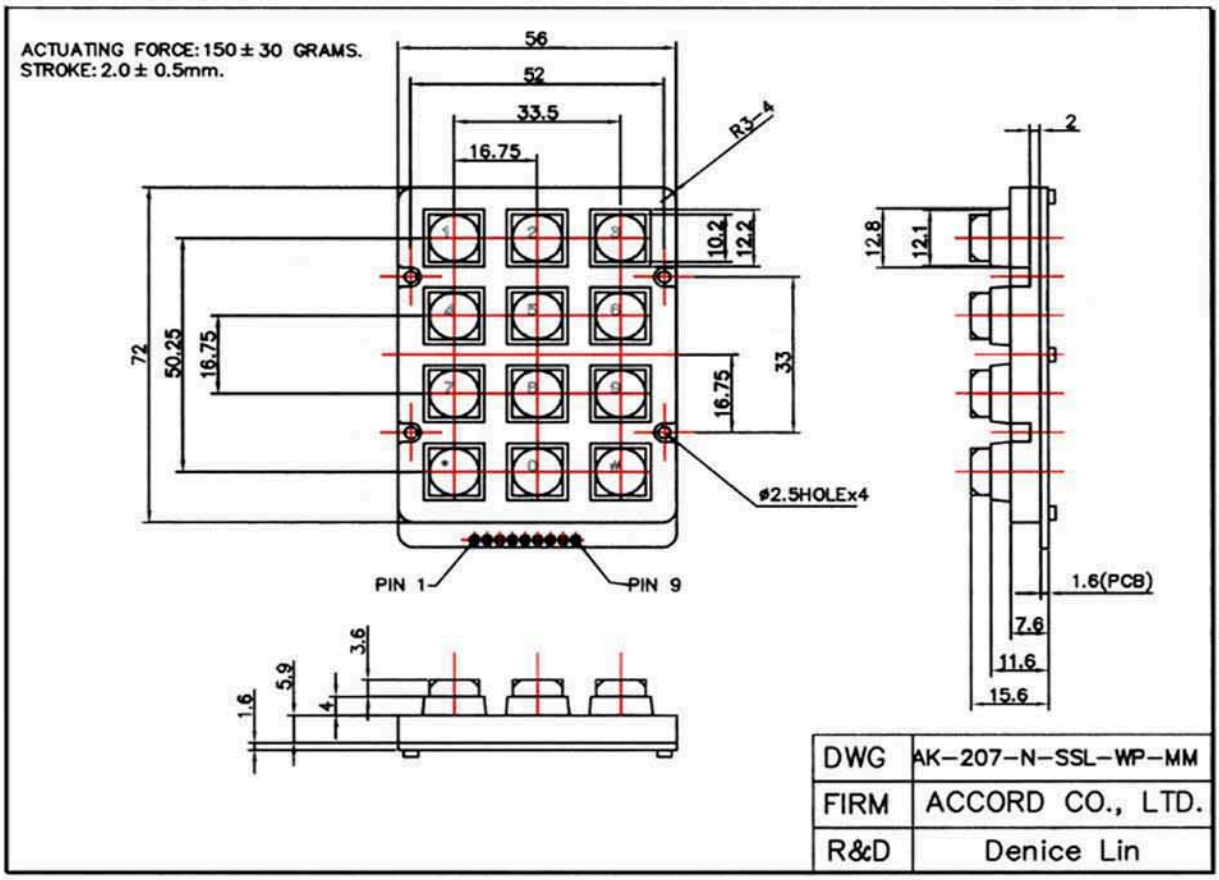

ACCORD CO., LTD.
8th Fl., No. 398, Jen Ai Road, Sec 4. Taipei. Taiwan.
Tel : 886-2-2704-4503
Fax : 886-2-2703-6358
E-mail : accordia@ms4.hinet.net
http://www.accordia.com.tw