

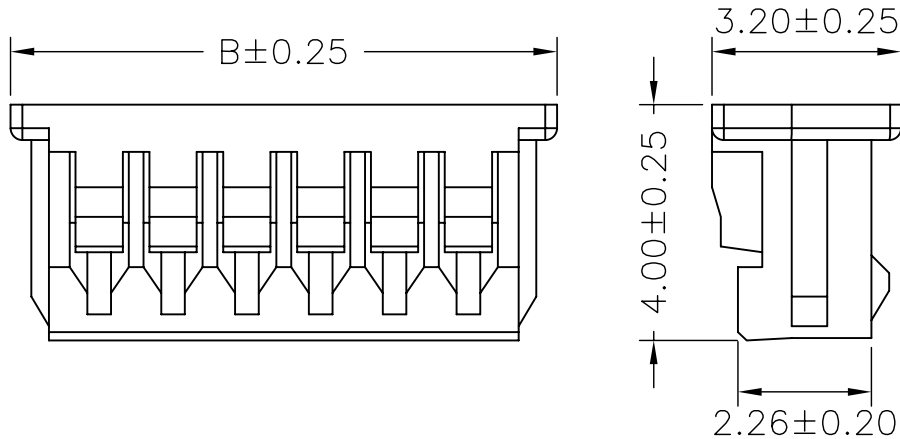


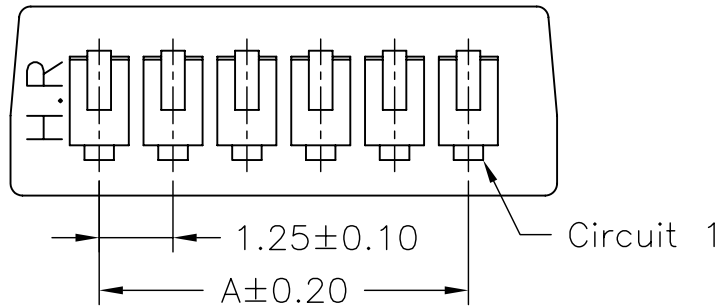

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

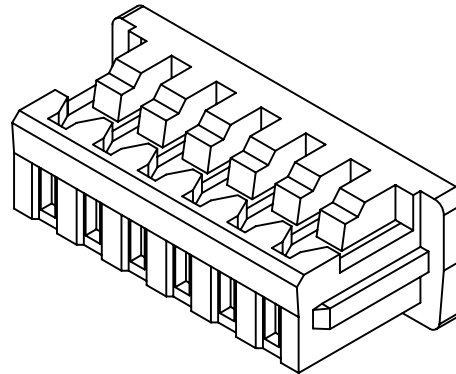

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max.
Insulation Resistance: $100\text{M}\Omega$ Min.
Withstanding Voltage: 500V AC/minute
Material: PBT,UL94V-0
Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1250H-02P	1.25	4.25
A1250H-03P	2.50	5.50
A1250H-04P	3.75	6.75
A1250H-05P	5.00	8.00
A1250H-06P	6.25	9.25
A1250H-07P	7.50	10.50
A1250H-08P	8.75	11.75
A1250H-09P	10.00	13.00
A1250H-10P	11.25	14.25
A1250H-11P	12.50	15.50
A1250H-12P	13.75	16.75
A1250H-13P	15.00	18.00
A1250H-14P	16.25	19.25
A1250H-15P	17.50	20.50
A1250H-16P	18.75	21.75
A1250H-17P	20.00	23.00
A1250H-18P	21.25	24.25

				JOINT TECH ELECTRONIC IND. CO., LTD.		
				JOY DAY INDUSTRIAL CO., LTD.		
				UNIT	SCALE	SHEET
				mm		1 of 1
			DRAWN BY	APPROVED BY		
			董正一	董正一		
			2001.02.01	2001.02.01		
			GENERAL TOLERANCE		1.25mm PITCH HOUSING	
			X. X±0.25	ANGLE±		
			X. XX±0.15			
			X. XXX±0.05			
B0	NEW RELEASE	2006.06.23	DRAW NO. :			
REV.	DESCRIPTION	DATE	A1250H-XP			
			REV. B0			