
**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

**datasheet for MST 3**
**article number: 973509100**

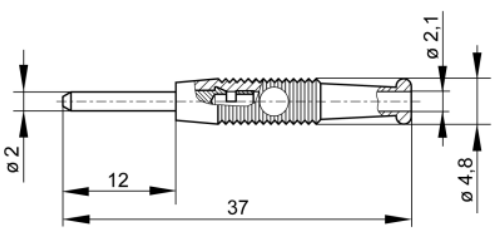

SKS Kontakttechnik GmbH

| **product description:** | order number: 973 509-100 |
|---|---|
| **description:** | 2 mm diameter miniature connector, nickel-plated brass pin with solder connection. Flexible, shatter-proof insulated sleeve. For making up connecting leads with a maximum external diameter of 1.9 mm. |
| **typ:** | MST 3 schwarz/black |
| **system:** | 2mm system |
| **order number:** | 973 509-100 |
| **color** | ● |
| **other color versions:** | ●●●●●● |
| **technical data** | |
| **measurement category acc. to IEC 61010:** | CAT I |
| **pin dimensions** | 2 mm |
| **type of contact:** | pin (unsprung) |
| **type of termination:** | solder |
| **rated voltage:** | 30 VAC / 60 VDC |
| **rated current:** Please consider derating curve! | 6 A |
| **contact resistance:** | 6 mOhm |
| **material** | |
| **contact material:** | brass |
| **contact surface material:** | nickel |
| **housing material:** | PVC - P |
| **environmental conditions:** | |
| **temperature range:** | -25 °C to +60 °C |
| **drawing** | |
| |  |



*Copyright ©2013 SKS Kontakttechnik GmbH / Neue Schichtstr. 14 / D-09366 Niederdorf (printed: Fri Jul 12 2013 11:38:01)*