



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 02/01/07	~	LJC 02/01/07
B	整理圖面	YCH 08/15/07	~	LJC 08/15/07
D	Drawing Update	JLZ 07/25/16'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30m Ω ? Max.INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE:500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE:1000M Ω ? Min.
- MECHANICAL CHARACTERISTICS:
 - DURABILITY: 300 CYCLES.

- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C~+105°C.

4. PRODUCT NUMBER CODE:

DS1036 - XX X X X X X - YT

SCREW TYPE
X:W/O SCREW
1:CC TYPE
2:CS TYPE

RIVET TYPE
P:W/ THREAD(UNC #4-40)
N:W/O THREAD(FOR W/O SCREW ONLY)

CONTACT PLATING
2: GOLD+NICKEL



HOUSING COLOR
U:BLUE
B:BLACK

STRAIN RELIEF
P:W/
N:W/O


CONNECTOR TYPE
M:MALE
F:FEMALE

No.OF CONTACTS
09:9pos 15:15pos
25:25pos 37:37pos


UPPER COVER

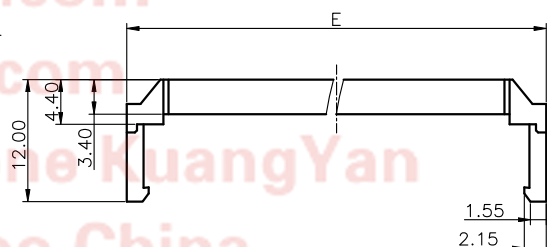

W/O SCREW TYPE



CC TYPE



CS TYPE

Position	A $\pm$ 0.1	B $\pm$ 0.2	C $\pm$ 0.2	D $\pm$ 0.2		E $\pm$ 0.2
				Male	Female	
9P	10.16	30.80	24.99	17.90	16.33	19.00
15P	17.78	39.14	33.32	26.50	24.66	27.34
25P	30.48	53.04	47.04	40.00	38.38	41.24
37P	45.72	69.32	63.50	56.50	54.84	57.52

GENERAL TOLERANCE ANGLE TOLERANCE

X.	$\pm$ 0.60	X.	$\pm$ 3°
.X	$\pm$ 0.38	.X	$\pm$ 2°
.XX	$\pm$ 0.25	.XX	$\pm$ 1°

DRAWING TYPE CUSTOMER


SCALE 1:1 SHEET 1 OF 1

DRAWING NO. C-DS1036-XXXXXXXX-YT-D


PROJECTION	TITLE	I.D.C D-SUB	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1036 SERIES



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

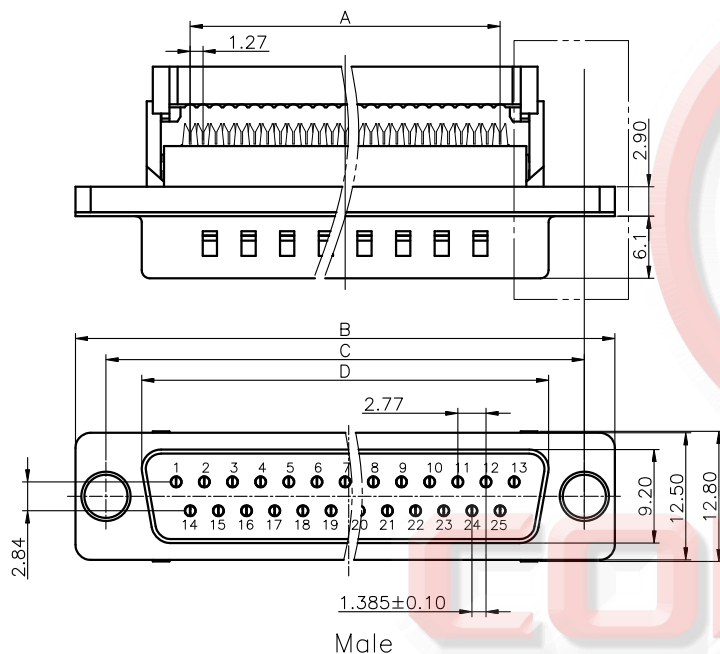

Male

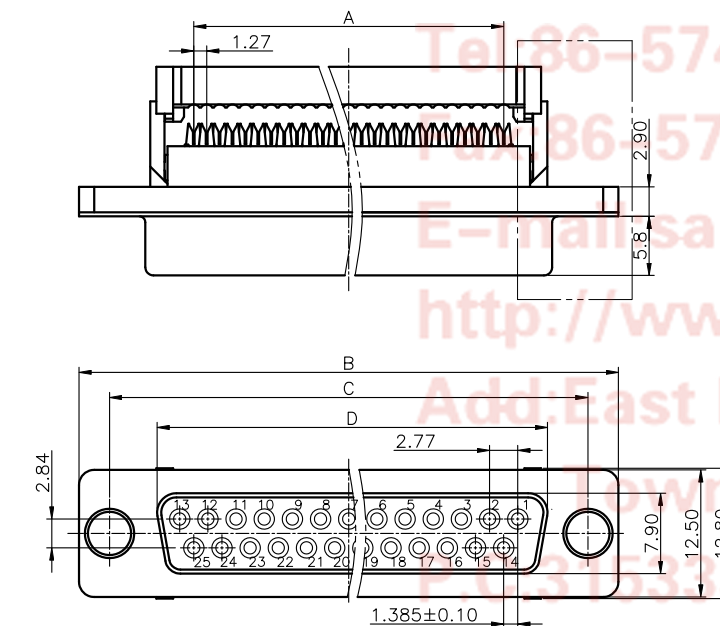

Female