

#### **EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at <u>www.hestore.hu</u>.



### PWM control RGBW LED Neon strip





#### **Product Description**

Silicone Neon LED flex made by extrusion, white color body, diffused color on the top side without light spot,

it's bendable within limited semidiameter, Anti-UV and salt

it's a 4 in 1 RGBW LED tape inside ,no Pixel control,





each small section can be cut down refer to

the black mark on the side of body

the standard size is 5meters included 10pcs mounting

clips 5Pin bare wire output from each side of the body



### Product Datasheet

Product Number	N010060CB4LZ	N010060CC4LZ			
LED Type	SMD RGBW	SMD RGBW			
Material	Silicon	Silicon			
Luminance/M	R: 30 G: 120 B: 20 W: 180	0 R: 91 G: 155 B: 37 W: 322			
Color Temperature	WW: 2500-3000K/W: 5000-550	WW: 2500-3000K/W: 5000-5500K			
ССТ	RGBW	RGBW			
Cutting Mark	50 MM	100 MM			
Operating Voltage	DC12V	DC24V			
Power (W)	15 W/M	19.2 W/M			
Dimension	5000*10*20 MM	5000*10*20 MM			
IP	IP65	IP65			
Net Weight	1.2kg/roll (5mm)	1.2kg/roll (5mm)			
Operation Temperature	- 40 ~ 50 °C	- 40 ~ 50 °C			

### Application



Hotels, restaurants, nights clubs.


Advertising signs, brightening.


Back lighting, edge lighting.

Dancefloor background.



### Correct bending way






Forbid

#### **Correct bending**



Face to the lighting surface ang fold the strip. The minimum bending diameter is 80mm



Lighting surface upwards and the strip can be bended to right or left naturally, The theminimum bending diameter is 100mm



Face to the side surface(as the picture shows), Do not bend it downward to damage the strip.



(as the picture shows) please do not twist the strip, or it will be damaged


#### Incorrect bending way



### Installation




clips 50x8x13mm(LxWxH)





profile 1000x8x13mm(LxWxH)




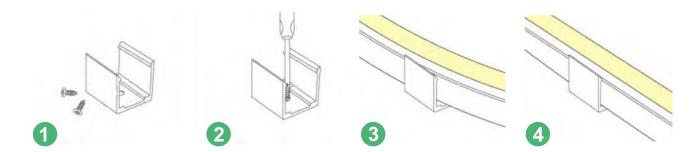


### Accessory(Excluded)


Name	Aluminum extrusion	Silicone glue	End cap	Mount clip
installation				
Renarks	L:1000 mm	10 ml/pc		



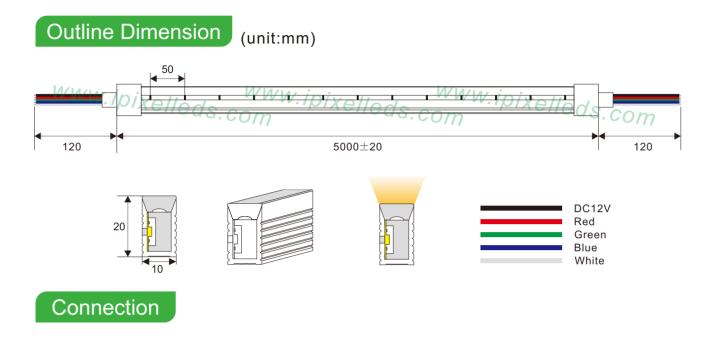

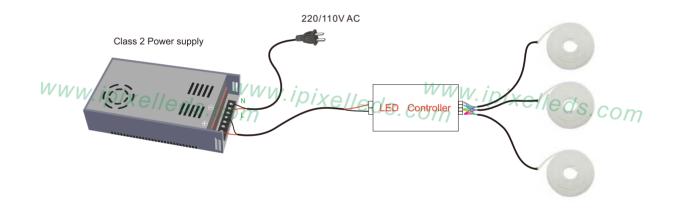

Product packaging



Product number	Standard length	Quantity / volume	outer carton size	Weight(kg)/reel
N010060CC4LZ	5M	240 Reels	L450xW350xH450mm	1.2kg
/				/
/				/
/				/
/				/
/				/