





EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

PART NUMBER

10118193-0001LF

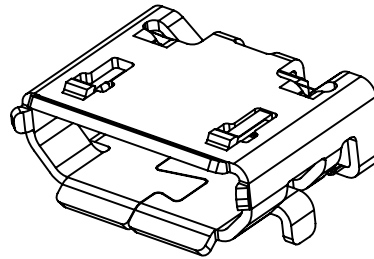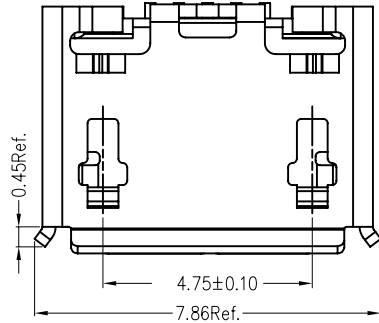

NOTES:

1. MATERIAL:

HOUSING: HIGH THERMOPLASTIC RESIN, UL94V-0, COLOR: BLACK
 TERMINAL: COPPER ALLOY
 SHELL: STAINLESS






2. FINISH:

CONTACT AREA: GOLD 30u" MIN. PLATED
 CONTACT SOLDER AREA: GOLD 2u" MIN. PLATED
 SHELL: MATTE TIN 80u" MIN. PLATED
 UNDER NICKEL 50u" MIN. PLATED ALL OVER.

3. PRODUCT SPECIFICATION: GS-12-641.

4. PACKAGING SPECIFICATION: GS-14-2180.

5. THE "LF" MEANS FOR LEAD FREE AND CAN WITHSTAND EXPOSE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN IR REFLOW PROCESS.

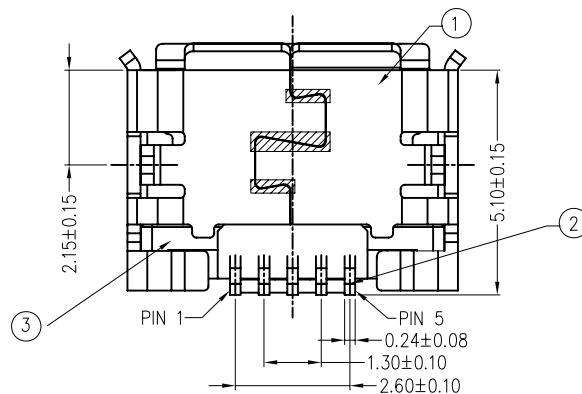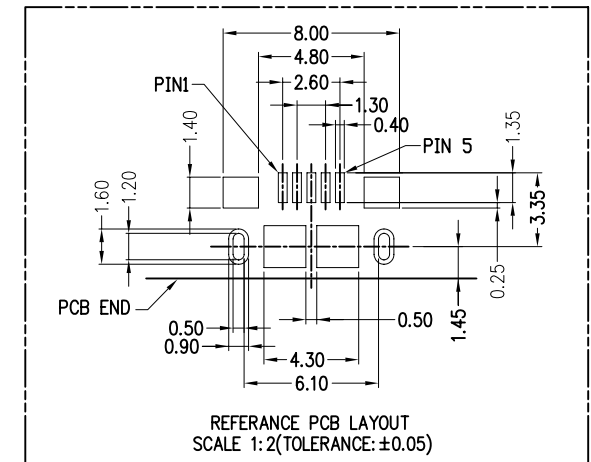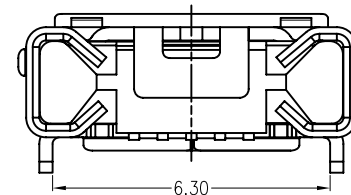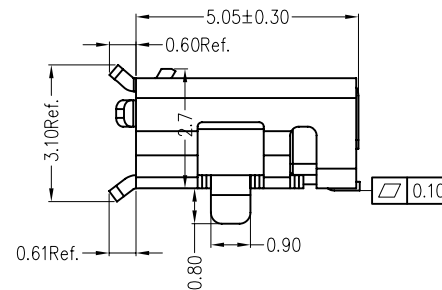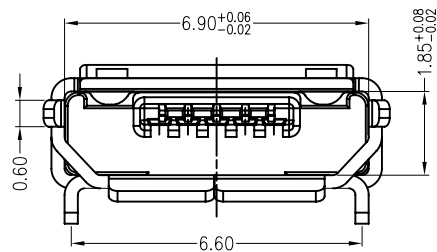

Item	Title	Q'TY
1	Shell	1
2	Terminal	5
3	InsertMolding	1

mat'l. code				surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family USB									
ltr		ecn no		dr		date		tolerances unless otherwise specified				title							
A		_____		LS		10/21/11		angles		linear		.X±0.38				MICRO USB B TYPE RECEPTACLE			
B		ELX-N-16099		JH		10/21/13						.XX±0.25							
C		ELX-N-20945		Nick		5/22/15		X*±2*				.XXX±0.10							
								dr		JASON HSU		05/21/11				dwg no 10118193			
								enr		JASON HSU		05/21/11							
								chr		JASON HSU		05/21/11							
								appd		GARY HSIEH		05/21/11							
sheet index		revision sheet		C		1										type CUSTOMER Drawing			