EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Surface Mount Type

Series : **FP** Type : **V**
High temperature
Lead-Free reflow (suffix : A*)



Features

- Low ESR (30 % to 50 % less than FK series)
- Endurance : 105 °C 2000 h
- Vibration-proof product is available upon request. (08 mm and larger)
- RoHS compliant

Specifications


Category temperature range	–55 °C to +105 °C							
Rated voltage range	6.3 V.DC to 50 V.DC							
Capacitance range	10 µF to 1800 µF							
Capacitance tolerance	±20 % (120 Hz/+20 °C)							
Leakage current	I ≦ 0.01 CV or 3 (µA) After 2 minutes (whichever is greater)							
Dissipation factor (tan δ)	Please see the attached characteristics list							
Characteristics at low temperature	V.DC	6.3	10	16	25	35	50	(Impedance ratio at 120 Hz)
	Z(–25 °C)/Z(+20 °C)	2	2	2	2	2	2	
	Z(–40°C)/Z(+20 °C)	3	3	3	3	3	3	
	Z(–55°C)/Z(+20 °C)	4	4	4	3	3	3	
Endurance	After applying rated working voltage at +105 °C ±2 °C for 2000 hours the capacitors shall meet the limits specified below. Post-test requirement at +20 °C							
	Capacitance change	Within ±30 % of the initial value						
	tan δ	≦ 200 % of the initial limit						
	DC leakage current	Within the initial limit						
Shelf life	After storage for 1000 hours at +105 °C±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)							
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits.							
	Capacitance change	Within ±10 % of the initial value						
	tan δ	Within the initial limit						
	DC leakage current	Within the initial limit						
AEC-Q200	AEC-Q200 compliant							

Frequency correction factor for ripple current

Capacitance (µF) \ Frequency (Hz)	120	1 k	10 k	100 k to
10 to 470	0.65	0.85	0.95	1.00
560 to 1800	0.75	0.90	0.95	1.00


Marking

Example : 6.3 V.DC 22 µF
Marking color : BLACK

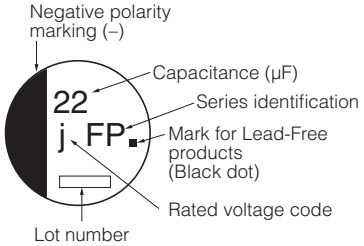

R. Voltage (V.DC)	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

Dimensions

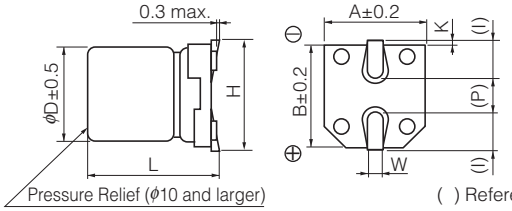

(Unit : mm)

Size code	φD	L	A, B	H	I	W	P	K
B	4.0	5.8±0.30	4.3	5.5 max.	1.8	0.65±0.1	1.0	$0.35^{+0.15}_{-0.20}$
C	5.0	5.8±0.30	5.3	6.5 max.	2.2	0.65±0.1	1.5	$0.35^{+0.15}_{-0.20}$
D	6.3	5.8±0.30	6.6	7.8 max.	2.6	0.65±0.1	1.8	$0.35^{+0.15}_{-0.20}$
D8	6.3	7.7±0.30	6.6	7.8 max.	2.6	0.65±0.1	1.8	$0.35^{+0.15}_{-0.20}$
E	8.0	6.2±0.30	8.3	9.5 max.	3.4	0.65±0.1	2.2	$0.35^{+0.15}_{-0.20}$
F	8.0	10.2±0.30	8.3	10.0 max.	3.4	0.90±0.2	3.1	0.70±0.20
G	10.0	10.2±0.30	10.3	12.0 max.	3.5	0.90±0.2	4.6	0.70±0.20

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Characteristics list

Endurance : 105 °C 2000 h

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Size* code	Specification			Part No.	Reflow	Min. Packaging Q'ty
		φD	L		Ripple current (100 kHz) (+105 °C) (mA r.m.s.)	ESR (100 kHz) (+20 °C) (Ω)	tan δ (120 Hz) (+20 °C)			Taping (pcs)
6.3	22	4	5.8	B	160	0.85	0.26	EEEFP0J220AR	(5)	2000
	47	4	5.8	(B)	160	0.85	0.26	EEEFPJ470UAR	(5)	2000
		5	5.8	C	240	0.36	0.26	EEEFP0J470AR	(5)	1000
	100	5	5.8	(C)	240	0.36	0.26	EEEFPJ101UAR	(5)	1000
		6.3	5.8	D	300	0.26	0.26	EEEFP0J101AP	(5)	1000
	220	6.3	5.8	D	300	0.26	0.26	EEEFP0J221AP	(5)	1000
	330	6.3	7.7	D8	600	0.16	0.26	EEEFPJ331XAP	(5)	900
		8	6.2	E	500	0.18	0.26	EEEFP0J331AP	(6)	1000
	470	8	10.2	F	850	0.08	0.26	EEEFP0J471AP	(6)	500
	1000	8	10.2	F	850	0.08	0.26	EEEFP0J102AP	(6)	500
	1500	10	10.2	G	1190	0.06	0.26	EEEFP0J152AP	(6)	500
	1800	10	10.2	(G)	850	0.08	0.26	EEEFPJ182UAP	(6)	500
10	22	4	5.8	B	160	0.85	0.19	EEEFP1A220AR	(5)	2000
	33	4	5.8	(B)	160	0.85	0.19	EEEFPA330UAR	(5)	2000
		5	5.8	C	240	0.36	0.19	EEEFP1A330AR	(5)	1000
	150	6.3	5.8	D	300	0.26	0.19	EEEFP1A151AP	(5)	1000
	220	6.3	7.7	D8	600	0.16	0.19	EEEFPA221XAP	(5)	900
		8	6.2	E	500	0.18	0.19	EEEFP1A221AP	(6)	1000
	330	8	10.2	F	850	0.08	0.19	EEEFP1A331AP	(6)	500
	470	8	10.2	F	850	0.08	0.19	EEEFP1A471AP	(6)	500
	680	8	10.2	F	850	0.08	0.19	EEEFP1A681AP	(6)	500
	1000	10	10.2	G	1190	0.06	0.19	EEEFP1A102AP	(6)	500
	1200	10	10.2	(G)	850	0.08	0.19	EEEFPA122UAP	(6)	500
16	10	4	5.8	B	160	0.85	0.16	EEEFP1C100AR	(5)	2000
	22	4	5.8	(B)	160	0.85	0.16	EEEFPC220UAR	(5)	2000
		5	5.8	C	240	0.36	0.16	EEEFP1C220AR	(5)	1000
	47	5	5.8	(C)	240	0.36	0.16	EEEFPC470UAR	(5)	1000
		6.3	5.8	D	300	0.26	0.16	EEEFP1C470AP	(5)	1000
	68	6.3	5.8	D	300	0.26	0.16	EEEFP1C680AP	(5)	1000
	100	6.3	5.8	D	300	0.26	0.16	EEEFP1C101AP	(5)	1000
		6.3	7.7	D8	600	0.16	0.16	EEEFPC101XAP	(5)	900
	150	6.3	7.7	D8	600	0.16	0.16	EEEFPC151XAP	(5)	900
	220	6.3	7.7	D8	600	0.16	0.16	EEEFPC221XAP	(5)	900
		8	6.2	E	500	0.18	0.16	EEEFP1C221AP	(6)	1000
	330	8	10.2	F	850	0.08	0.16	EEEFP1C331AP	(6)	500
	470	8	10.2	F	850	0.08	0.16	EEEFP1C471AP	(6)	500
	680	10	10.2	G	1190	0.06	0.16	EEEFP1C681AP	(6)	500
	820	10	10.2	(G)	850	0.08	0.16	EEEFPC821UAP	(6)	500
25	10	4	5.8	B	160	0.85	0.14	EEEFP1E100AR	(5)	2000
	22	5	5.8	C	240	0.36	0.14	EEEFP1E220AR	(5)	1000
	33	5	5.8	(C)	240	0.36	0.14	EEEFPE330UAR	(5)	1000
		6.3	5.8	D	300	0.26	0.14	EEEFP1E330AP	(5)	1000
	47	6.3	5.8	D	300	0.26	0.14	EEEFP1E470AP	(5)	1000
	68	6.3	5.8	D	300	0.26	0.14	EEEFP1E680AP	(5)	1000
	100	6.3	7.7	D8	600	0.16	0.14	EEEFPE101XAP	(5)	900
		8	6.2	E	500	0.18	0.14	EEEFP1E101AP	(6)	1000
	150	8	10.2	F	850	0.08	0.14	EEEFP1E151AP	(6)	500
	220	8	10.2	F	850	0.08	0.14	EEEFP1E221AP	(6)	500
	330	8	10.2	F	850	0.08	0.14	EEEFP1E331AP	(6)	500
	470	10	10.2	G	1190	0.06	0.14	EEEFP1E471AP	(6)	500
	560	10	10.2	(G)	850	0.08	0.14	EEEFPE561UAP	(6)	500

✻ Size code( ) : Miniaturization product

If Part number exceeds 12 digits, voltage code is abbreviated as follows; 0J → J, 1A → A, 1C → C, 1E → E, 1V → V

· Please refer to the page of "Reflow Profile" and "The Taping Dimensions".

· When requesting vibration-proof product, please put the last "V" instead to "P"

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Characteristics list

Endurance : 105 °C 2000 h

Rated voltage (V.DC)	Cap. (±20 %) (μF)	Case size (mm)		Size* code	Specification			Part No.	Reflow	Min. Packaging Q'ty
		φD	L		Ripple current (100 kHz) (+105 °C) (mA r.m.s.)	ESR (100 kHz) (+20 °C) (Ω)	tan δ (120 Hz) (+20 °C)			Taping (pcs)
35	10	4	5.8	(B)	160	0.85	0.12	EEEFPV100UAR	(5)	2000
	22	5	5.8	C	240	0.36	0.12	EEEFP1V220AR	(5)	1000
	33	6.3	5.8	D	300	0.26	0.12	EEEFP1V330AP	(5)	1000
	47	6.3	5.8	D	300	0.26	0.12	EEEFP1V470AP	(5)	1000
	68	6.3	7.7	D8	600	0.16	0.12	EEEFPV680XAP	(5)	900
	100	6.3	7.7	D8	600	0.16	0.12	EEEFPV101XAP	(5)	900
		8	10.2	F	850	0.08	0.12	EEEFP1V101AP	(6)	500
	150	8	10.2	F	850	0.08	0.12	EEEFP1V151AP	(6)	500
	220	8	10.2	F	850	0.08	0.12	EEEFP1V221AP	(6)	500
	330	10	10.2	G	1190	0.06	0.12	EEEFP1V331AP	(6)	500
	390	10	10.2	(G)	850	0.08	0.12	EEEFPV391UAP	(6)	500
50	100	8	10.2	F	670	0.18	0.10	EEEFP1H101AP	(6)	500
	220	10	10.2	G	900	0.12	0.10	EEEFP1H221AP	(6)	500

✻ Size code( ) : Miniaturization product

If Part number exceeds 12 digits, voltage code is abbreviated as follows; 0J → J, 1A → A, 1C → C, 1E → E, 1V → V

· Please refer to the page of “Reflow Profile” and “The Taping Dimensions”.

· When requesting vibration-proof product, please put the last “V” instead to “P”

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.