EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

HIRSCHMANN® Test & Measurement
A BRAND OF SKS

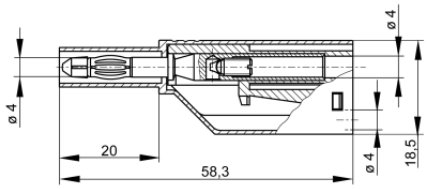
SKS Kontakttechnik GmbH

Plugs

LAS S WS



CE

Product	LAS S WS
description	Safety connector for tower construction with screw connection for leads from 0.5 mm² to 1.5 mm², outer diameter of lead max. 4.2 mm. Plug 4 mm with caged spring, rigid socket 4 mm, 1000 V-system. Simple assembly by "Click-System".
operating instruction	BA461
article-no. / *colour	9340991xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 05 brown · 06 gray · 07 white · 09 violet Ni
drawing	
	
technical data	
connection	screw terminal
rated voltage(1)	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current(1) (consider derating curve)	24 A
material plug	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010(2)	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

(1) for normal environmental conditions -5°C to +40°C

4 mm safety system

[2] contact the manufacturer for applications at deviating temperature ranges
stand: 28.01.2019