EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


UT116 SERIES
SMD TESTERS

NEW CE RoHS
Patent pending


- 36V DC voltage measurement
- Battery measurement (10mA) (UT116C)
- Resistance, capacitance (UT116C: up to 100mF), continuity, diode measurement
- The pen can be rotated by 180°, which is convenient for reading and diode/LED
- zener diode polarity test




	UT116A	UT116C
Display count	3000	6000
Resistance	30MΩ	60MΩ
Capacitance	30mF	100mF
Diode test	3V	3.2V
LED/stabilivolt	About 21V/1mA	About 21V/1mA
Continuity Test	＜30Ω	＜50Ω
DCV	36V	
Battery test		Load current ≈ 10mA
Auto range	√	√
Auto scan identification	√	
Auto power off	√	√
Power	1.5V battery (R03) x 2	
Display	39mm x 20mm	
Product color	Red and grey	
Product net weight	About 80g	
Product size	204mm x 33mm x 25mm	
Standard accessories	Battery	
Standard individual packing	Gift box, English manual	
Standard quantity per carton	60pcs	
Standard carton measurement	440mm x 420mm x 210mm	
Standard carton gross weight	About 7.1kg	

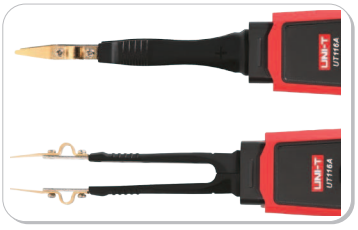

The pen can be rotated by 180° for easy reading and operation

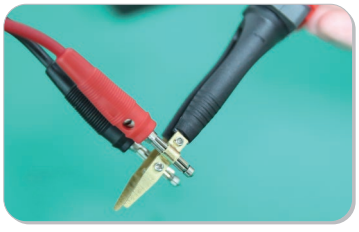

Probe attachment

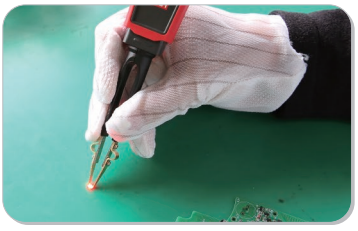

LED measurement