



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Features:

- * Available in 2 thru 24 circuit housing
- * Voltage rating 600V (R.M.S.)
- * Current rating 9 Amps per circuit





Specification:

Material:

- * UL 94V-2 nylon 66

Electrical:

- * Voltage rating: 600V AC/DC
- * Current rating: 9A max
- * Withstanding Voltage: 1500V AC for 60 seconds
- * Insulation Resistance: 1000M ohms min
- * Temperature Rise: 30°C max
- * Storage Temperature Range: -40°C to 105°C

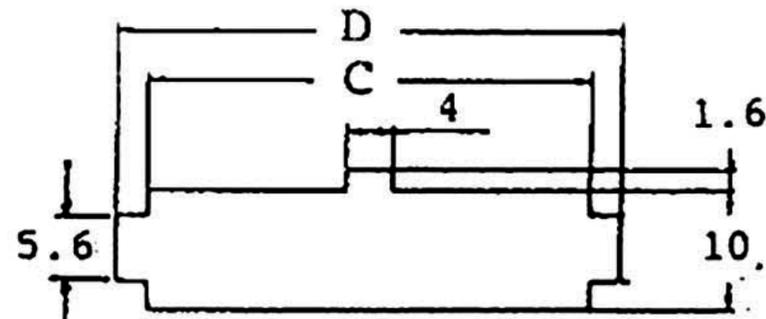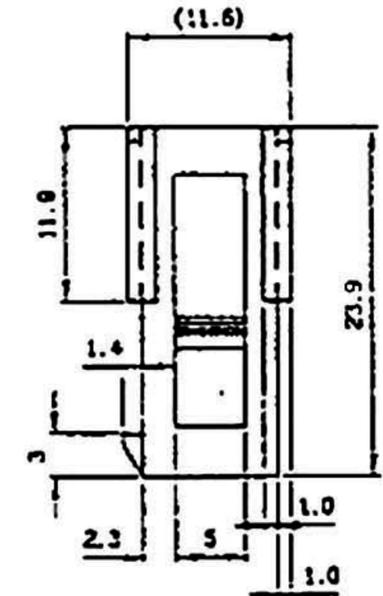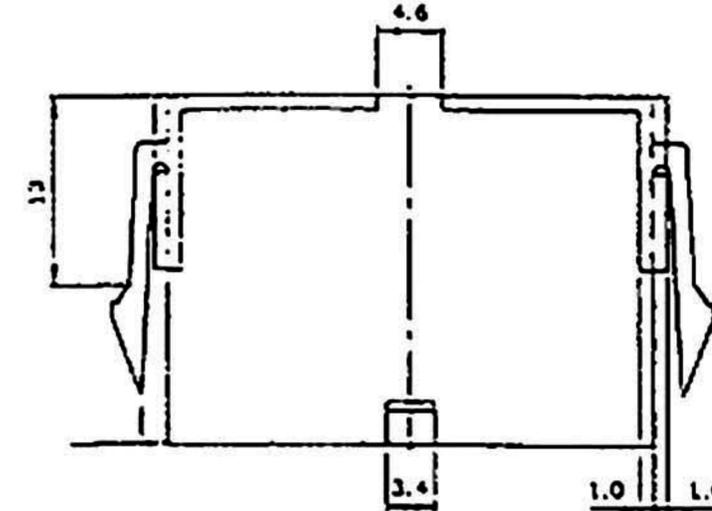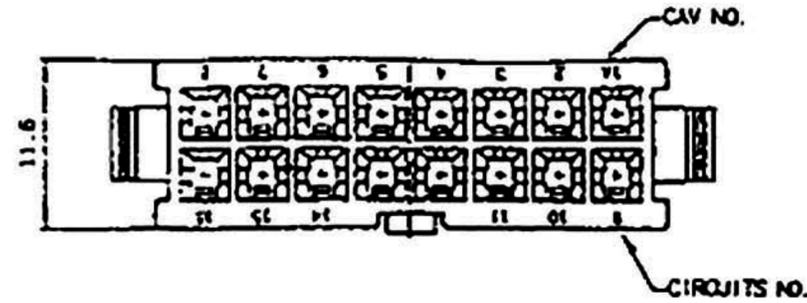


Mounting Hole Details for 4259-NE Housing

Max. Panel Thickness: 2.54mm

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2		5.4	5.8	10.8	10	16.8	22.2	22.0	27.6	18	33.0	39.0	39.1	41.1
4	4.2	9.8	10.0	15.0	12	21.0	26.4	26.8	31.8	20	37.8	43.2	43.6	46.5
6	6.4	13.8	14.2	19.2	14	25.2	30.8	31.0	35.0	22	42.0	47.4	47.8	52.8
8	12.6	18.0	18.4	23.4	16	29.4	34.8	35.2	40.2	24	48.2	54.0	54.0	57.3

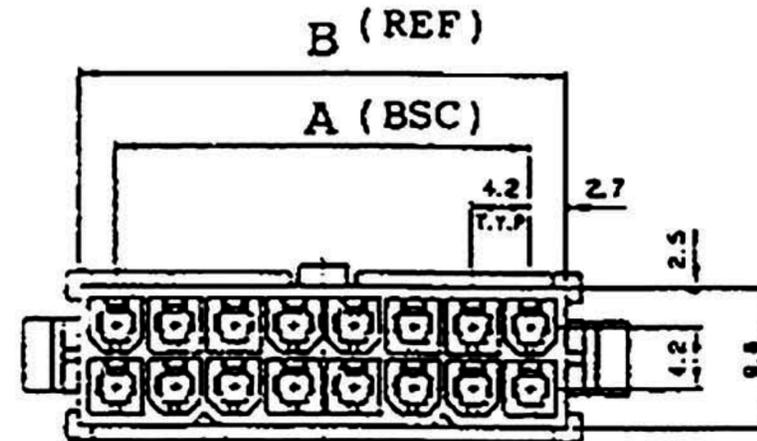

<p>RoHS Compliant</p>		<p><i>Gold Star Connectors Co., Ltd.</i></p>	
<p>APPD. 核准</p>	<p>SCALE 比例 参考</p>	<p>TOLERANCE 容許公差</p> <p>0. ±</p> <p>.0 ±</p> <p>.00 ±</p>	<p>PART NAME 品名</p> <p>FEMALE HOUSE 4,2mm WHITE RoHS</p>
<p>DWG. 製圖</p> <p><i>Jolin</i></p>	<p>UNIT 單位</p> <p>MM</p>	<p>SIZE 紙張尺寸</p> <p>A4</p>	<p>PART NO. 料號</p> <p>NCHD420-xxM</p>
<p>DATE 制表日</p> <p>2006/06/02</p>	<p>PAGE 張數</p> <p>1 OF 1</p>	<p>REV. 版本</p> <p>A</p>	