
EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

DATASHEET

16PIN SSOP PHOTOTRANSISTOR PHOTOCOUPLER
ELQ3H7 Series



Schematic

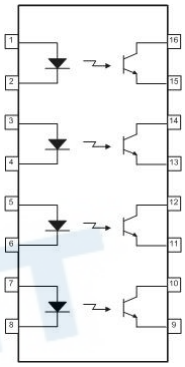

Pin Configuration

1, 3, 5, 7 Anode
2, 4, 6, 8 Cathode
9, 11, 13, 15 Emitter
10, 12, 14, 16 Collector

Features:

- Compliance Halogens Free
  (Br < 900 ppm, Cl < 900 ppm, Br+Cl < 1500 ppm)
- Current transfer ratio
  (CTR: 50~600% at IF =5mA, VCE =5V)
- High isolation voltage between input and output
  (Viso=3750 V rms)
- Compact 8 Pin SSOP with a 2.0 mm profile
- The product itself will remain within RoHS compliant version
- Compliance with EU REACH
- UL and cUL approved (No. E214129)
- VDE approved (No. 40028116)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CQC approved

Description

The ELQ3H7 contains of an infrared emitting diode optically coupled to a phototransistor detector encapsulated with green compound.

ELQ3H7 offers 4 channels in a 16-pin small outline SMD package.

Applications

- DC-DC Converters
- Programmable controllers
- Telecommunication equipments
- Signal transmission between circuits of different potentials and impedances

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3

Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

Absolute Maximum Ratings (Ta=25℃)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	60	mA
	Peak forward current (1us, pulse)	I_{FP}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	70	mW
Output	Power dissipation	P_C	150	mW
	Collector current	I_C	50	mA
	Collector-Emitter voltage	V_{CEO}	80	V
	Emitter-Collector voltage	V_{ECO}	7	V
Total Power Dissipation		P_{TOT}	200	mW
Isolation Voltage*1		V_{ISO}	3750	V rms
Operating temperature		T_{OPR}	-55 ~ +110	°C
Storage temperature		T_{STG}	-55 ~ +125	°C
Soldering Temperature*2		T_{SOL}	260	°C

Notes:

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, LED side pins shorted together, and detector side pins shorted together.

*2 For 10 seconds

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3
www.everlight.com
Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

Electro-Optical Characteristics (Ta=25℃ unless specified otherwise)

Input

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward voltage	V_F	-	1.2	1.4	V	I_F = 20mA
Reverse current	I_R	-	-	10	μA	V_R = 4V
Input capacitance	C_{in}	-	30	250	pF	V = 0, f = 1kHz

Output

Parameter	Symbol	Min	Typ.	Max.	Unit	Condition
Collector-Emitter dark current	I_{CEO}	-	-	100	nA	V_{CE} = 20V, I_F = 0mA
Collector-Emitter breakdown voltage	BV_{CEO}	80	-	-	V	I_C = 0.1mA
Emitter-Collector breakdown voltage	BV_{ECO}	7	-	-	V	I_E = 0.1mA

Transfer Characteristics (T_a=25°C unless specified otherwise)

Parameter	Symbol	Min	Typ.	Max.	Unit	Condition
Current Transfer ratio	CTR	50	-	600	%	I_F = 5mA ,V_{CE} = 5V
Collector-Emitter saturation voltage	$V_{CE(sat)}$	-	0.1	0.2	V	I_F = 10mA ,I_C = 1mA
Isolation resistance	R_{IO}	5×10^{10}	-	-	Ω	V_{IO} = 500Vdc, 40~60% R.H.
Floating capacitance	C_{IO}	-	0.3	1.0	pF	V_{IO} = 0, f = 1MHz
Rise time	t_r	-	5	18	μs	V_{CE} = 2V, I_C = 2mA, R_L = 100Ω
Fall time	t_f	-	3	18	μs	

* Typical values at T_a = 25°C

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3
www.everlight.com
Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

Typical Electro-Optical Characteristics Curves

Figure 1. Forward Current vs Forward Voltage

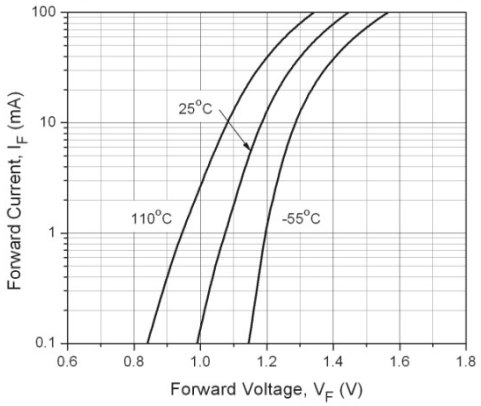


Figure 2. Normalized Collector Current vs Forward Current

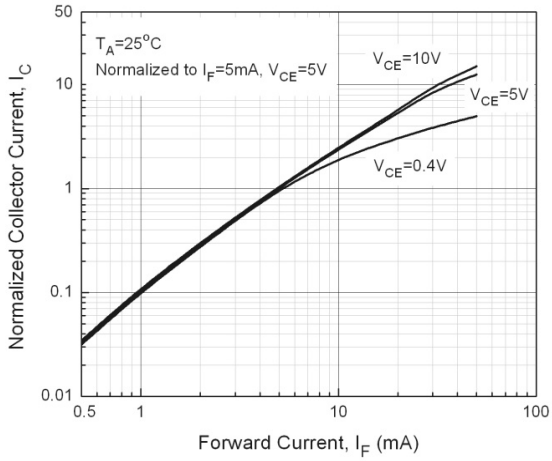


Figure 3. Normalized Current Transfer Ratio vs Forward Current

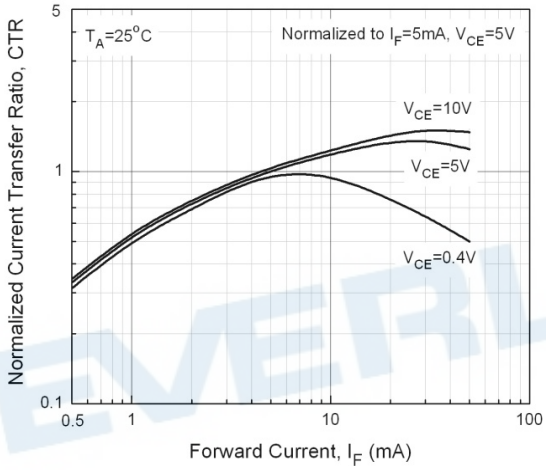


Figure 4. Normalized Collector Current vs Ambient Temperature

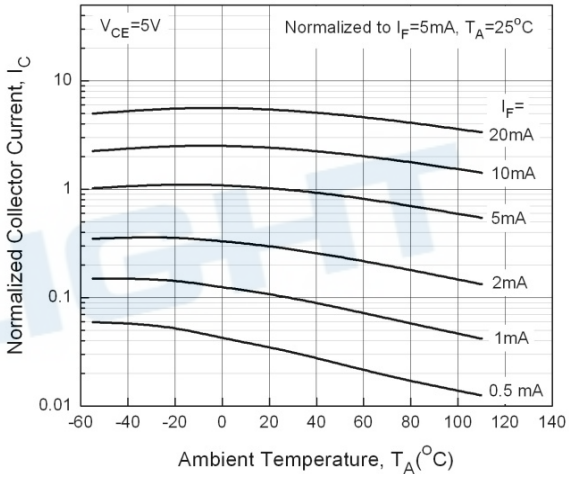


Figure 5. Normalized Current Transfer Ratio vs Ambient Temperature


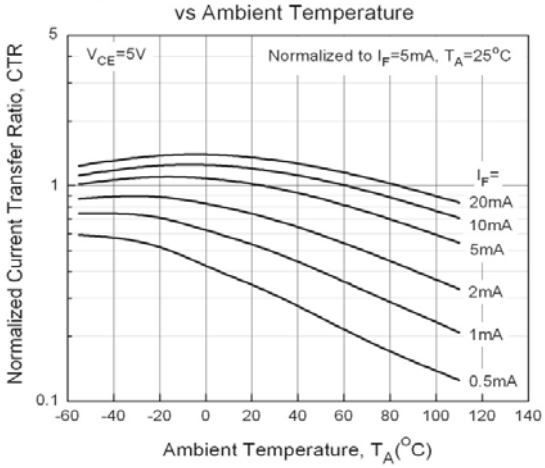


Figure 6. Collector Current vs Collector-Emitter Voltage

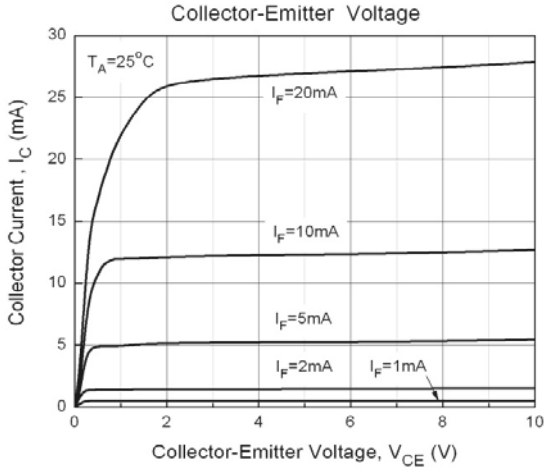

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3

Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

Figure 7. Collector Current vs Collector-Emitter Voltage

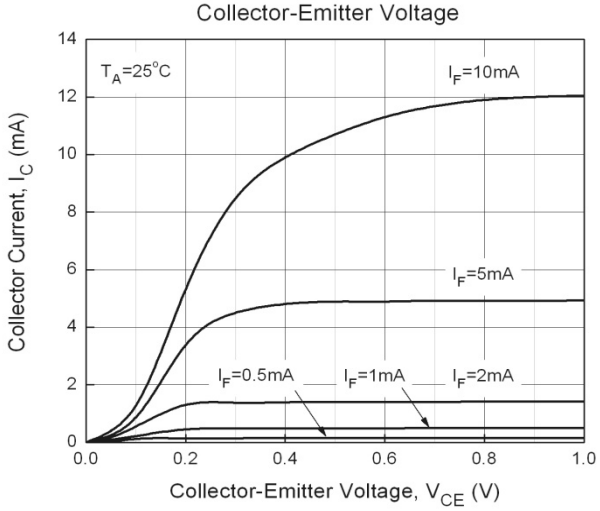


Figure 8. Collector Dark Current vs Ambient Temperature

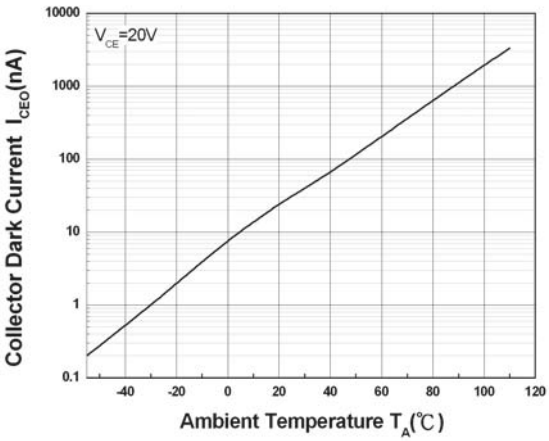


Figure 9. Collector-Emitter Saturation Voltage vs Ambient Temperature

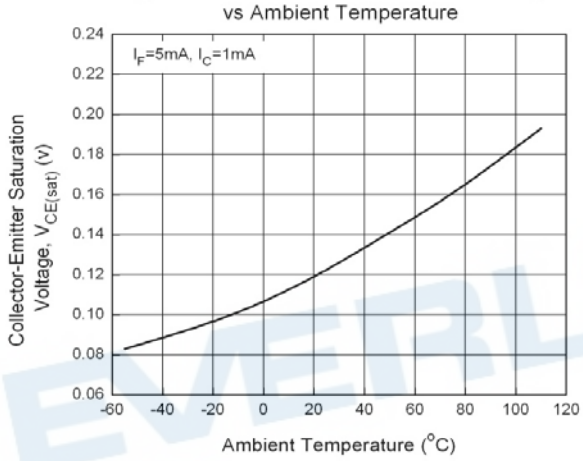
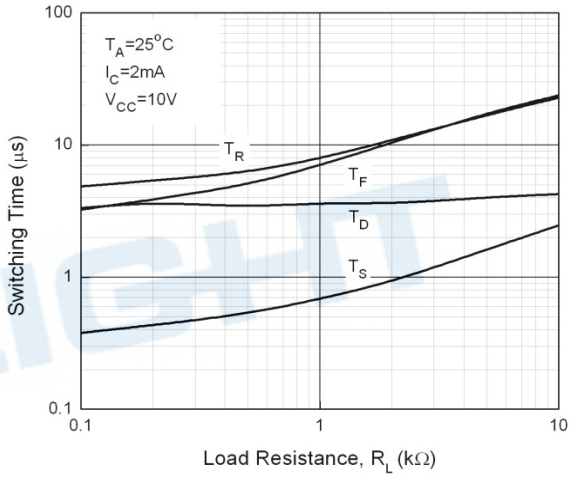
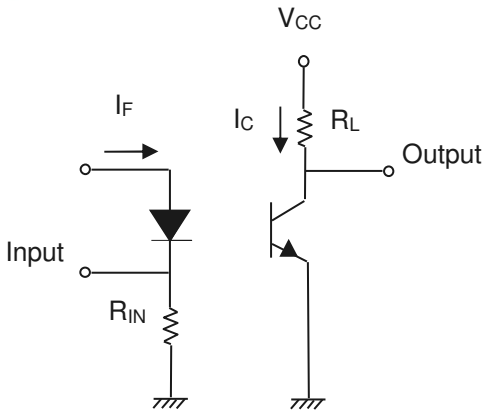


Figure 10. Switching Time vs Load Resistance





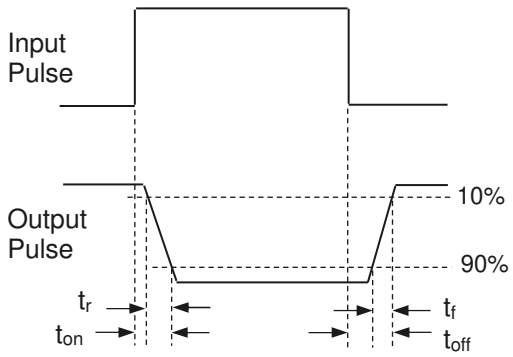


Figure 11. Switching Time Test Circuit & Waveforms

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3
www.everlight.com
Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

Order Information

Part Number

ELQ3H7(Z)-VG


Note

Q3H7 = Part No.
Z = Tape and reel option (TA or none).
V = VDE (optional)
G = Halogens free

Option	Description	Packing quantity
None	Tube option of ELQ3H7	40 units per tube
(TA)	Tape & reel option of ELQ3H7	1000 units per reel

Package Dimension (Dimensions in mm)


ELQ3H7

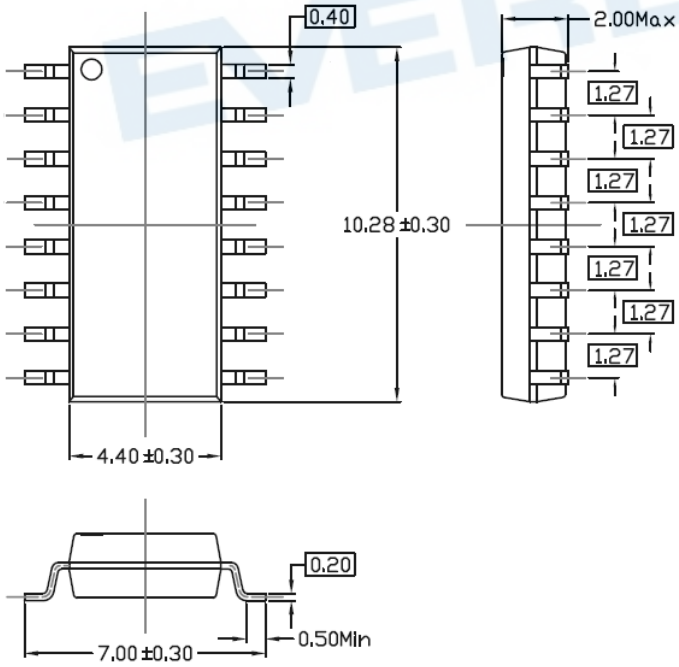


Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3

Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

Recommended pad layout for surface mount leadform

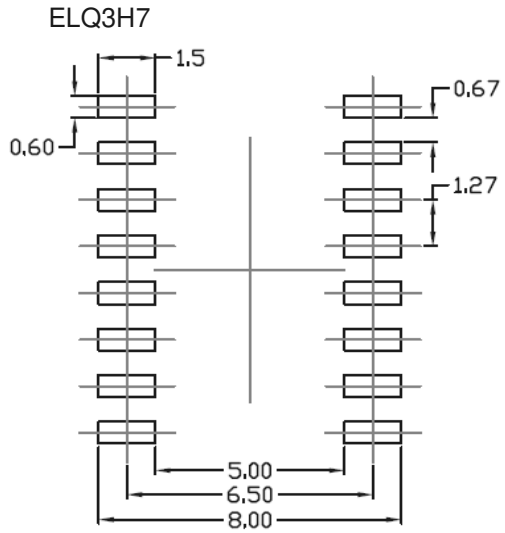

Device Marking

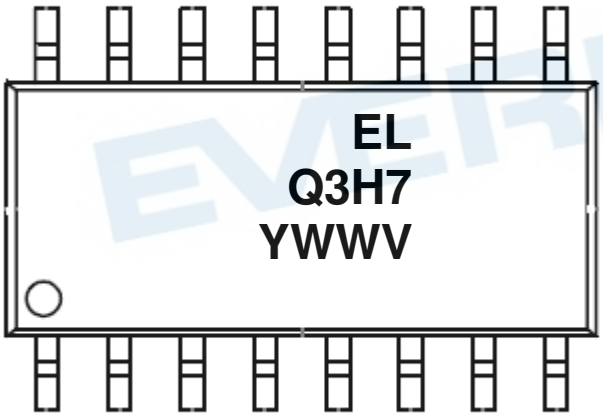


Notes

EL	denotes Everlight
Q3H7	denotes Device Number
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE (optional)

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3
www.everlight.com
Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)


Tape & Reel Packing Specifications

ELQ3H7

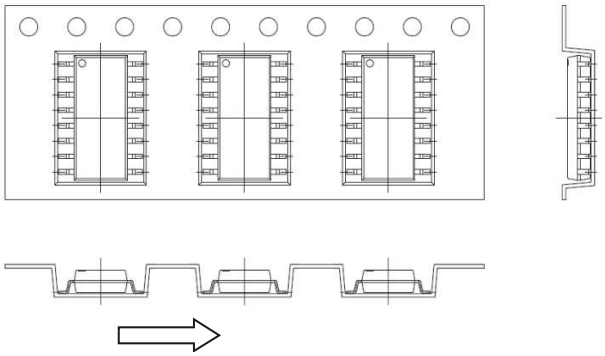

Direction of feed from reel

Tape dimensions

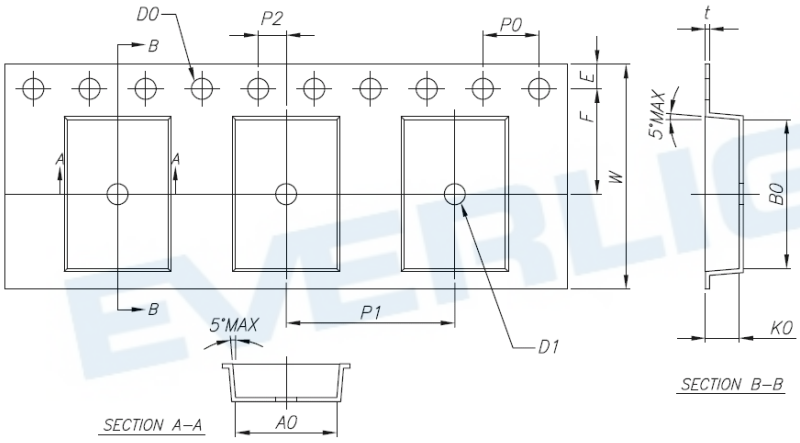


Dimension No.		*A0*	*B0*	*D0*	*D1*	*E*	*F*
Dimension (mm)	Q3H7	7.2±0.1	10.6±0.1	1.5+0.1 -0	1.5+0.1 -0	1.75±0.1	7.5±0.1
Dimension No.		*P0*	*P1*	*P2*	*t*	*W*	*K0*
Dimension (mm)	Q3H7	4.0±0.1	12.0±0.1	2.0±0.1	0.3±0.05	16.0±0.3	2.4±0.1

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3
www.everlight.com
Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

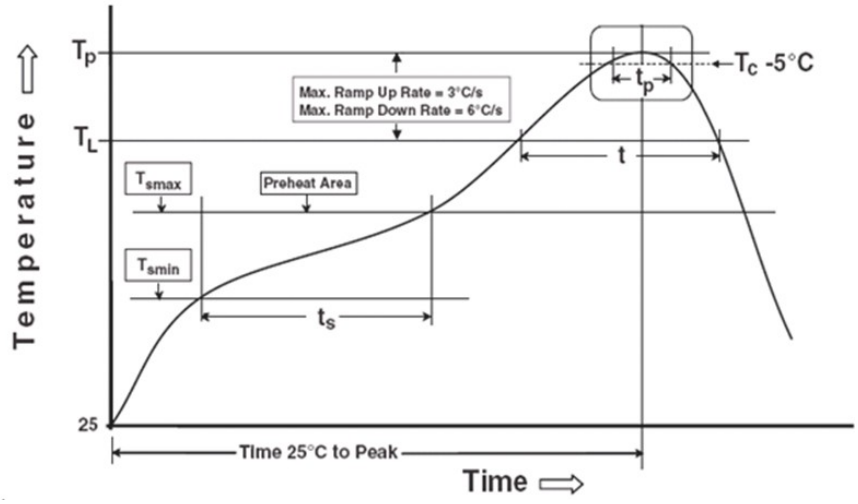

Note: Reference: IPC/JEDEC J-STD-020D

Preheat	
Temperature min (T_{smin})	150 °C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds
Average ramp-up rate (T_{smax} to T_p)	3 °C/second max
Other	
Liquidus Temperature (T_L)	217 °C
Time above Liquidus Temperature (t_L)	60-100 sec
Peak Temperature (T_P)	260°C
Time within 5 °C of Actual Peak Temperature: T_P - 5°C	30 s
Ramp- Down Rate from Peak Temperature	6°C /second max.
Time 25°C to peak temperature	8 minutes max.
Reflow times	3 times

.

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3

Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Copyright © 2010, Everlight All Rights Reserved. Release Date: Sep 3, 2021. Issue No: DPC-0000159 Rev.3

Ver.:3 Release Date:09/08/2021 狀態:Approved(正式發行)