



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



ASSEMBLY INSTRUCTION

speakON® TXX Series


Lockable 4 pole Loudspeaker Cable Connector with metal housing

IMPORTANT SAFETY INSTRUCTION

“CAUTION: NOT FOR INTERRUPTING CURRENT”

“ATTENTION: NE PAS UTILISER POUR COUPER LE COURANT”

Attention: speakON® is not to be used as an AC mains or power supply connector!

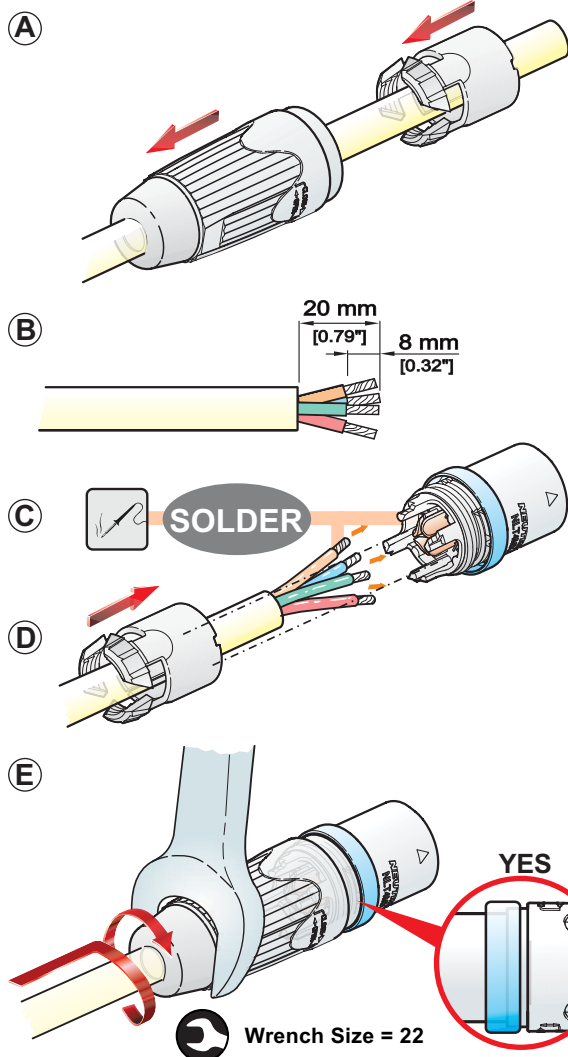


Assembly of the Cable Connector


- A Place bushing and chuck over the cable.
- B Prepare cable as shown.
- C Solder the wire ends to contacts of insert.
- D Slide the chuck up the cable and align with the housing.
- E Slide the bushing up the cable and tighten it (flat wrench SW 22 mm).

Important: Bushing must be screwed onto housing minimum 3 turns thus there is no gap between housing and bushing.

Wiring of the Male Cable Connector:



Wiring of the Female Receptacle and the Cable Connector:

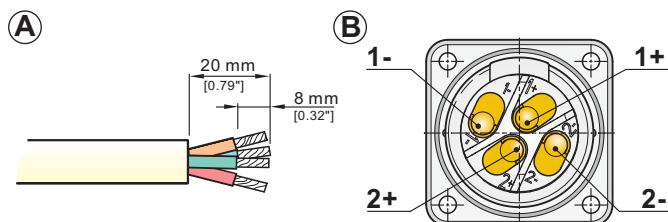

- A Prepare cable as shown.
- B Insert the wires into the terminals and solder it.

Neutrik AG
Neutrik USA Inc.
Neutrik (UK) Ltd.
Neutrik Vertriebs GmbH

LI
USA
UK
DE/NL/AT/DK

T: +423 / 237 24 24
T: +1 704 / 972 3050
T: +44 1983 / 811 441
T: +49 8131 / 280 890

F: +423 / 232 53 93
F: +1 704 / 438 9202
F: +44 1983 / 811 439
F: +49 8131 / 280 830

Neutrik France
Neutrik Tokyo Ltd.
Neutrik Hong Kong Ltd.
Neutrik India Pvt. Ltd.

FR
JP
HK
IND

T: +33 1 / 4131 6750
T: +81 3 / 3663 4733
T: +852 / 2687 6055
T: +91 / 982 05 43 424

F: +33 1 / 4131 0511
F: +81 3 / 3663 4796
F: +852 / 2687 6052
F: +91 / 22 26163 540

Draft. Nr.: BDA 614 V2 | Update: 2021-02-18 Data subject to change without prior notice. © 2020 NEUTRIK®. NEUTRIK® are registered trademark of Neutrik AG. ALL RIGHTS RESERVED.