



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

Subminiature Fuse, 8.5 mm, Time-Lag T, 250 VAC, 35 A



IEC 60127-3 · 250 VAC · Time-Lag T



**Description**

- Directly solderable on printed circuit boards
- Low Breaking Capacity

**Standards**

- IEC 60127-3/4
- UL 248-14
- CSA C22.2 no. 248.14

**Approvals**

- VDE License Number: 40013529 (0.05 A - 4 A), 40002080 (5 A + 6.3 A)
- UL File Number: E41599

**Applications**

- Primary Protection on PCB
- Power Supply Adapter for e.g. laptops
- SMPS (Switching Mode Power Supply) for TV's and DVD's

**References**

General Product Information  
 Time-Current Curves see last page  
 Corresponding Fuseholder [FMS \(250V\)](#)  
 Fuse Kit [Microfuses](#)  
 Packaging Details

**Weblinks**

Approvals: [www.schurter.com/approvals](http://www.schurter.com/approvals)  
 RoHS: <http://www.schurter.com/rohs>  
 CHINA-RoHS: [www.schurter.com/china-rohs](http://www.schurter.com/china-rohs)  
 Webstore: [www.schurterinc.com/estore/search.html](http://www.schurterinc.com/estore/search.html)


**Technical Data**

Rated Voltage	250VAC
Rated Current	0.05 - 6.3A
Breaking Capacity	35A - 63A
Characteristic	Time-Lag T
Mounting	PCB,THT
Admissible Ambient Air Temp.	-55 °C to 125 °C
Climatic Category	55/125/21 acc. to IEC 60068-1
Material: Housing	Thermoplastic, UL 94V-0
Material: Terminals	Tin-Plated Copper
Unit Weight	0.53 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Current Rating, Voltage Rating, Characteristic, Approvals

Soldering Methods	Wave, Iron
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Moisture Resistance Test	MIL-STD-202, Method 106E (50 cycles in a temp./mister chamber)
Terminal Strength	MIL-STD-202, Method 211A (Deflection of board 1 mm for 1 minute)
Case Resistance	acc. to EIA/IS-722, Test 4.7 >100 MΩ (between leads and body)
Mechanical Shock	MIL-STD-202, Method 213B (Shock 50gn, half sine wave, 11 ms)
Vibration, High Frequency	MIL-STD-202, Method 204D (Shock 20 gn, 20 min, 10-2 kHz, 12 cyc.)
Resistance to Solvents	MIL-STD-202, Method 215A

**Dimensions**

Length 8.5 mm

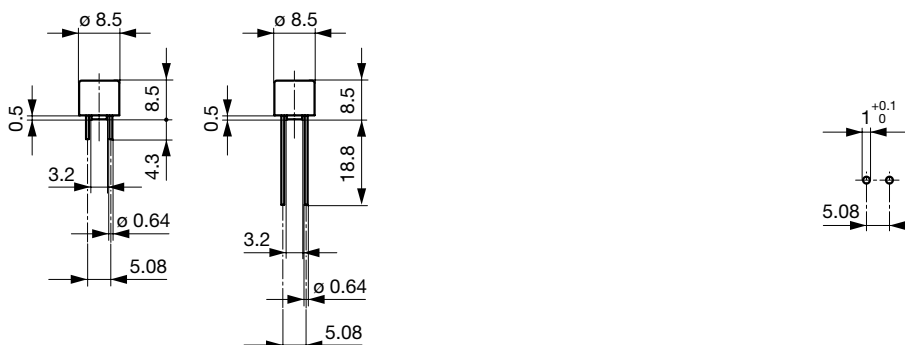

Drilling Diagram








## Pre-Arcing Time








Rated Current I <sub>n</sub>	1.5 x I <sub>n</sub> min.	2.1 x I <sub>n</sub> max.	2.75 x I <sub>n</sub> min.	2.75 x I <sub>n</sub> max.	4.0 x I <sub>n</sub> min.	4.0 x I <sub>n</sub> max.	10.0 x I <sub>n</sub> min.	10.0 x I <sub>n</sub> max.
0.05 A - 6.3 A	60 min	120 s	400 ms	10 s	150 ms	3 s	20 ms	150 ms

## Variants

Webstore

S = Short Terminals  
L = Long Terminals  
T = Taped and Reeled

Order Number	S	L	T	Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> max. [mV]	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> max. [mW]	Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s]							
0034.6602	●			0.05	250	1)	550	415	155	0.03	●	●	●	●	●	●	●
0034.6603	●			0.063	250	1)	480	420	160	0.05	●	●	●	●	●	●	●
0034.6604	●			0.08	250	1)	400	360	165	0.06	●	●	●	●	●	●	●
0034.6605	●			0.1	250	1)	350	320	170	0.08	●	●	●	●	●	●	●
0034.6606	●			0.125	250	1)	300	270	180	0.12	●	●	●	●	●	●	●
0034.6607	●			0.16	250	1)	280	190	190	0.24	●	●	●	●	●	●	●
0034.6608	●			0.2	250	1)	260	150	200	0.35	●	●	●	●	●	●	●
0034.6609	●			0.25	250	1)	240	120	220	0.6	●	●	●	●	●	●	●
0034.6610	●			0.315	250	1)	220	120	250	0.8	●	●	●	●	●	●	●
0034.6611	●			0.4	250	1)	200	110	280	1.1	●	●	●	●	●	●	●
0034.6612	●			0.5	250	1)	190	100	310	2.5	●	●	●	●	●	●	●
0034.6613	●			0.63	250	1)	180	90	360	4	●	●	●	●	●	●	●
0034.6614	●			0.8	250	1)	160	80	430	8	●	●	●	●	●	●	●
0034.6615	●			1	250	1)	140	70	500	12	●	●	●	●	●	●	●
0034.6616	●			1.25	250	1)	130	70	600	15	●	●	●	●	●	●	●
0034.6617	●			1.6	250	1)	120	60	730	30	●	●	●	●	●	●	●
0034.6618	●			2	250	1)	100	60	870	34	●	●	●	●	●	●	●
0034.6619	●			2.5	250	1)	100	50	1000	55	●	●	●	●	●	●	●
0034.6620	●			3.15	250	1)	100	50	1200	76	●	●	●	●	●	●	●
0034.6621	●			4	250	2)	100	50	1400	80	●	●	●	●	●	●	●
0034.6622	●			5	250	2)	-	50	-	230	●	●	●	●	●	●	●
0034.6623	●			6.3	250	2)	-	45	-	360	●	●	●	●	●	●	●
0034.6702	●			0.05	250	1)	550	415	155	0.03	●	●	●	●	●	●	●
0034.6703	●			0.063	250	1)	480	420	160	0.05	●	●	●	●	●	●	●
0034.6704	●			0.08	250	1)	400	360	165	0.06	●	●	●	●	●	●	●
0034.6705	●			0.1	250	1)	350	320	170	0.08	●	●	●	●	●	●	●
0034.6706	●			0.125	250	1)	300	270	180	0.12	●	●	●	●	●	●	●
0034.6707	●			0.16	250	1)	280	190	190	0.24	●	●	●	●	●	●	●
0034.6708	●			0.2	250	1)	260	150	200	0.35	●	●	●	●	●	●	●
0034.6709	●			0.25	250	1)	240	120	220	0.6	●	●	●	●	●	●	●
0034.6710	●			0.315	250	1)	220	120	250	0.8	●	●	●	●	●	●	●
0034.6711	●			0.4	250	1)	200	110	280	1.1	●	●	●	●	●	●	●
0034.6712	●			0.5	250	1)	190	100	310	2.5	●	●	●	●	●	●	●
0034.6713	●			0.63	250	1)	180	90	360	4	●	●	●	●	●	●	●
0034.6714	●			0.8	250	1)	160	80	430	8	●	●	●	●	●	●	●
0034.6715	●			1	250	1)	140	70	500	12	●	●	●	●	●	●	●
0034.6716	●			1.25	250	1)	130	70	600	15	●	●	●	●	●	●	●
0034.6717	●			1.6	250	1)	120	60	730	30	●	●	●	●	●	●	●
0034.6718	●			2	250	1)	100	60	870	34	●	●	●	●	●	●	●
0034.6719	●			2.5	250	1)	100	50	1000	55	●	●	●	●	●	●	●
0034.6720	●			3.15	250	1)	100	50	1200	76	●	●	●	●	●	●	●
0034.6721	●			4	250	2)	100	50	1400	80	●	●	●	●	●	●	●
0034.6722	●			5	250	2)	-	50	-	230	●	●	●	●	●	●	●
0034.6723	●			6.3	250	2)	-	45	-	360	●	●	●	●	●	●	●
0034.6802	●			0.05	250	1)	550	415	155	0.03	●	●	●	●	●	●	●
0034.6803	●			0.063	250	1)	480	420	160	0.05	●	●	●	●	●	●	●

Order Number	S	L	T	Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> max. [mV]	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> max. [mW]	Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s]							
0034.6804	●			0.08	250	1)	400	360	165	0.06	●				●		●
0034.6805	●			0.1	250	1)	350	320	170	0.08	●				●		●
0034.6806	●			0.125	250	1)	300	270	180	0.12	●				●		●
0034.6807	●			0.16	250	1)	280	190	190	0.24	●				●		●
0034.6808	●			0.2	250	1)	260	150	200	0.35	●				●		●
0034.6809	●			0.25	250	1)	240	120	220	0.6	●				●		●
0034.6810	●			0.315	250	1)	220	120	250	0.8	●				●		●
0034.6811	●			0.4	250	1)	200	110	280	1.1	●				●		●
0034.6812	●			0.5	250	1)	190	100	310	2.5	●				●		●
0034.6813	●			0.63	250	1)	180	90	360	4	●				●		●
0034.6814	●			0.8	250	1)	160	80	430	8	●				●		●
0034.6815	●			1	250	1)	140	70	500	12	●				●		●
0034.6816	●			1.25	250	1)	130	70	600	15	●				●		●
0034.6817	●			1.6	250	1)	120	60	730	30	●				●		●
0034.6818	●			2	250	1)	100	60	870	34	●				●		●
0034.6819	●			2.5	250	1)	100	50	1000	55	●				●		●
0034.6820	●			3.15	250	1)	100	50	1200	76	●				●		●
0034.6821	●			4	250	2)	100	50	1400	80	●				●		●
0034.6822	●			5	250	2)	-	50	-	230		●	●			●	●
0034.6823	●			6.3	250	2)	-	45	-	360		●	●			●	●

1) IEC: 35 A @ 250 VAC

1) UL: 35 A @ 250 VAC / 50 A @ 125 VDC

2) IEC: 10 I<sub>n</sub> @ 250 VAC

2) UL: 10 I<sub>n</sub> @ 250 VAC / 10 I<sub>n</sub> @ 125 VDC

### Packaging Unit

S + L = Plastic Bag (100 pcs.)

T = Taped 36 cm Reel (750 pcs.)

### Time-Current Curves

