EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


International
IOR Rectifier

PD - 91258E

IRLML2803


HEXFET® Power MOSFET

- Generation V Technology
- Ultra Low On-Resistance
- N-Channel MOSFET
- SOT-23 Footprint
- Low Profile (<1.1mm)
- Available in Tape and Reel
- Fast Switching



V_{DSS} = 30V

$R_{DS(on)}$ = 0.25Ω



Micro3

Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

A customized leadframe has been incorporated into the standard SOT-23 package to produce a HEXFET Power MOSFET with the industry's smallest footprint. This package, dubbed the Micro3, is ideal for applications where printed circuit board space is at a premium. The low profile (<1.1mm) of the Micro3 allows it to fit easily into extremely thin application environments such as portable electronics and PCMCIA cards.

Absolute Maximum Ratings

	Parameter	Max.	Units
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 10V	1.2	A
I_D @ T_A = 70°C	Continuous Drain Current, V_{GS} @ 10V	0.93	
I_{DM}	Pulsed Drain Current ①	7.3	
P_D @T_A = 25°C	Power Dissipation	540	mW
	Linear Derating Factor	4.3	mW/°C
V_{GS}	Gate-to-Source Voltage	±20	V
E_{AS}	Single Pulse Avalanche Energy⑤	3.9	mJ
dv/dt	Peak diode Recovery dv/dt②	5.0	V/ns
T_J ,T_{STG}	Junction and Storage Temperature Range	-55 to + 150	°C

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JA}$	Maximum Junction-to-Ambient ④	—	230	°C/W


04/10/07

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	30	–––	–––	V	V_{GS} = 0V, I_D = 250µA
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	–––	0.029	–––	V/°C	Reference to 25°C, I_D = 1mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	–––	–––	0.25	Ω	V_{GS} = 10V, I_D = 0.91A ③
		–––	–––	0.40		V_{GS} = 4.5V, I_D = 0.46A ③
$V_{GS(th)}$	Gate Threshold Voltage	1.0	–––	–––	V	V_{DS} = V_{GS}, I_D = 250µA
g_{fs}	Forward Transconductance	0.87	–––	–––	S	V_{DS} = 10V, I_D = 0.46A
I_{DSS}	Drain-to-Source Leakage Current	–––	–––	1.0	µA	V_{DS} = 24V, V_{GS} = 0V
		–––	–––	25		V_{DS} = 24V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	–––	–––	-100	nA	V_{GS} = -20V
	Gate-to-Source Reverse Leakage	–––	–––	100		V_{GS} = 20V
Q_g	Total Gate Charge	–––	3.3	5.0	nC	I_D = 0.91A
Q_{gs}	Gate-to-Source Charge	–––	0.48	0.72		V_{DS} = 24V
Q_{gd}	Gate-to-Drain ("Miller") Charge	–––	1.1	1.7		V_{GS} = 10V, See Fig. 6 and 9 ③
$t_{d(on)}$	Turn-On Delay Time	–––	3.9	–––	ns	V_{DD} = 15V
t_r	Rise Time	–––	4.0	–––		I_D = 0.91A
$t_{d(off)}$	Turn-Off Delay Time	–––	9.0	–––		R_G = 6.2Ω
t_f	Fall Time	–––	1.7	–––		R_D = 16Ω, See Fig. 10 ③
C_{iss}	Input Capacitance	–––	85	–––	pF	V_{GS} = 0V
C_{oss}	Output Capacitance	–––	34	–––		V_{DS} = 25V
C_{rss}	Reverse Transfer Capacitance	–––	15	–––		f = 1.0MHz, See Fig. 5

Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	–––	–––	0.54	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	–––	–––	7.3		
V_{SD}	Diode Forward Voltage	–––	–––	1.2	V	T_J = 25°C, I_S = 0.91A, V_{GS} = 0V ③
t_{rr}	Reverse Recovery Time	–––	26	40	ns	T_J = 25°C, I_F = 0.91A
Q_{rr}	Reverse RecoveryCharge	–––	22	32	nC	di/dt = 100A/µs ③



Notes:

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)

② I_{SD} ≤ 0.91A, di/dt ≤ 120A/µs, V_{DD} ≤ $V_{(BR)DSS}$, T_J ≤ 150°C

③ Pulse width ≤ 300µs; duty cycle ≤ 2%.

④ Surface mounted on FR-4 board, t ≤ 5sec.

⑤ Limited by T_{Jmax}, starting T_J = 25°C, L = 9.4mH, R_G = 25Ω, I_{AS} = 0.9A.

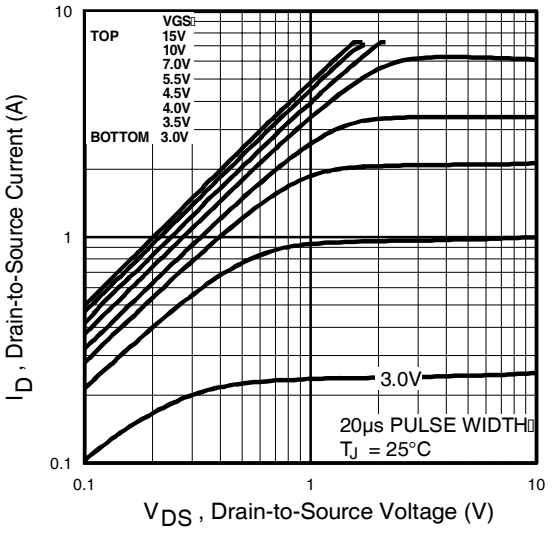


Fig 1. Typical Output Characteristics

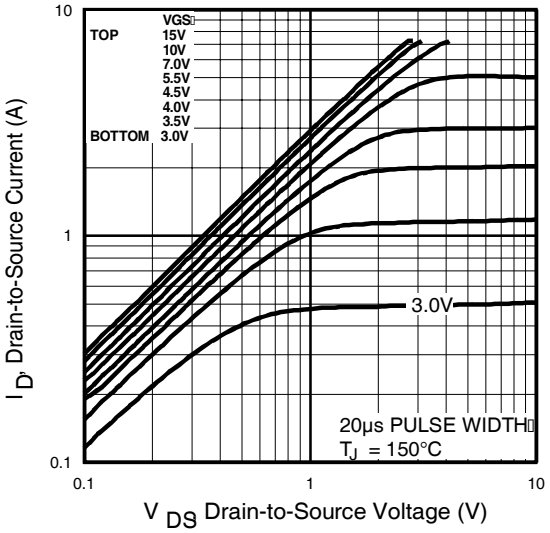


Fig 2. Typical Output Characteristics

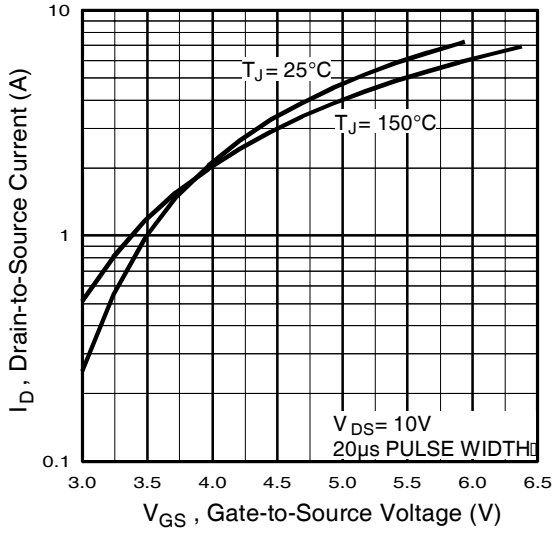


Fig 3. Typical Transfer Characteristics

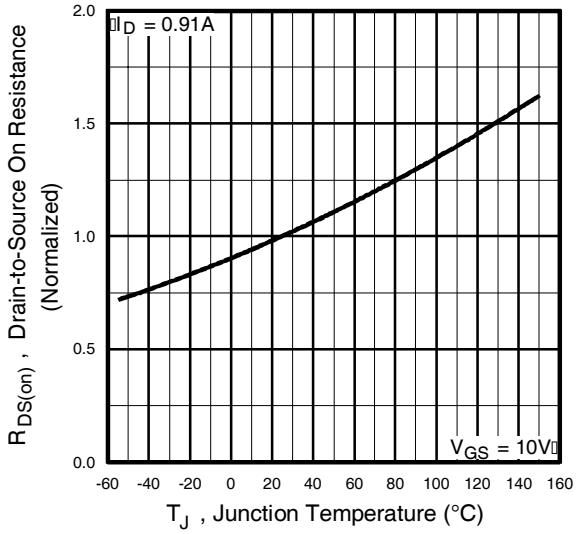


Fig 4. Normalized On-Resistance Vs. Temperature

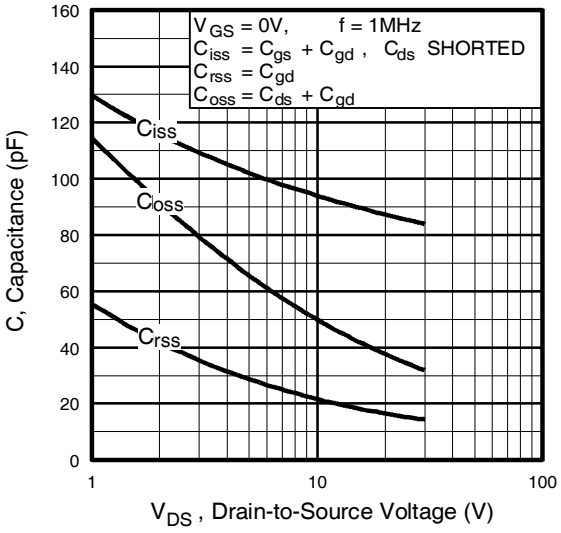


Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

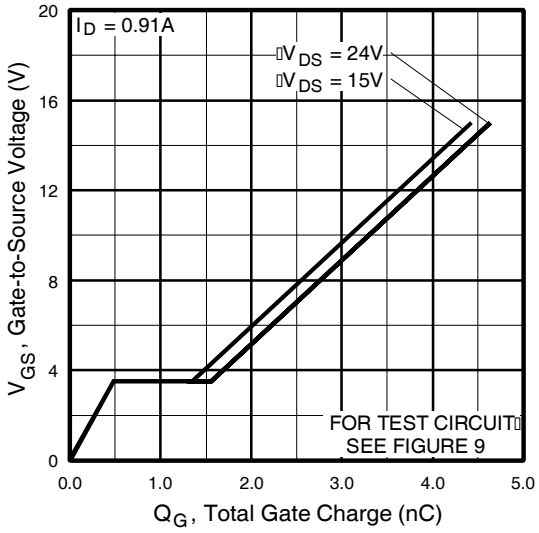


Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

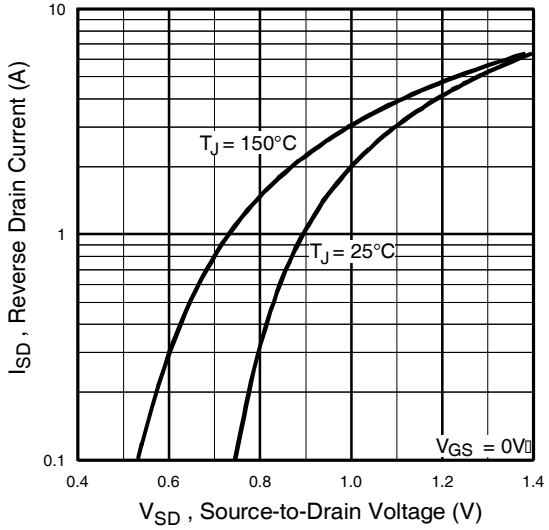


Fig 7. Typical Source-Drain Diode Forward Voltage

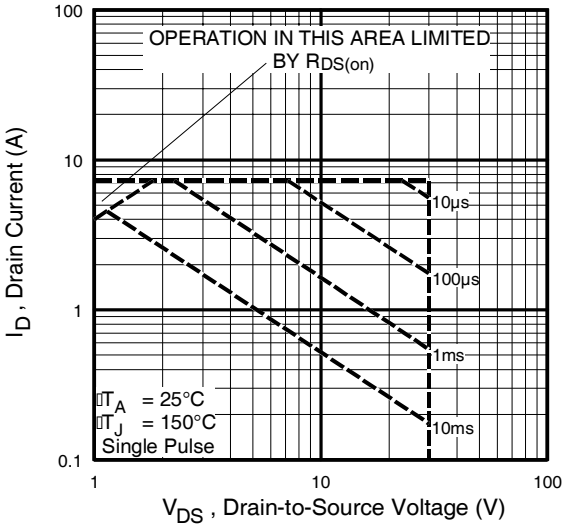


Fig 8. Maximum Safe Operating Area

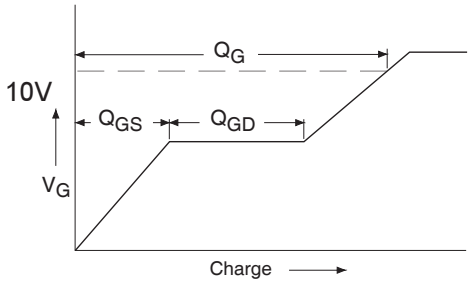


Fig 9a. Basic Gate Charge Waveform

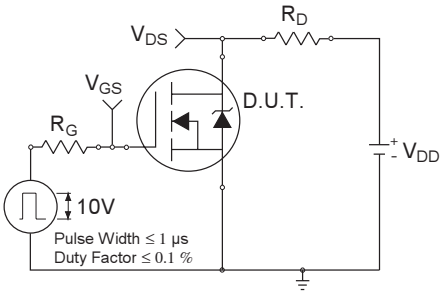


Fig 10a. Switching Time Test Circuit

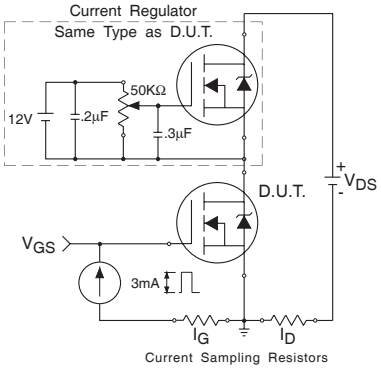


Fig 9b. Gate Charge Test Circuit

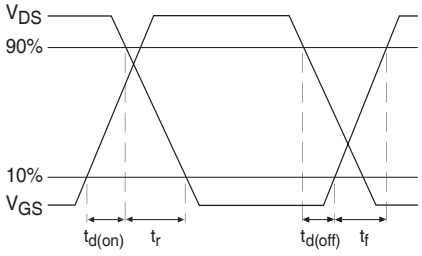


Fig 10b. Switching Time Waveforms

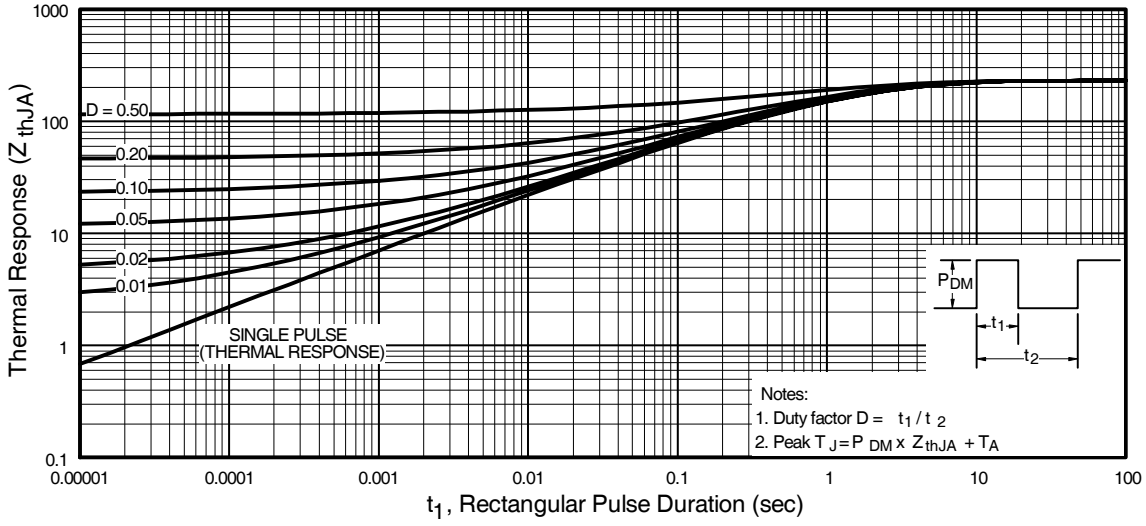


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

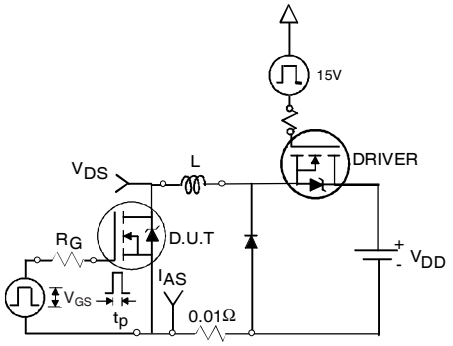


Fig 12a. Unclamped Inductive Test Circuit

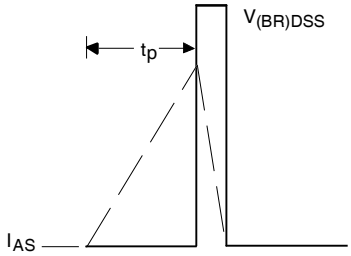


Fig 12b. Unclamped Inductive Waveforms

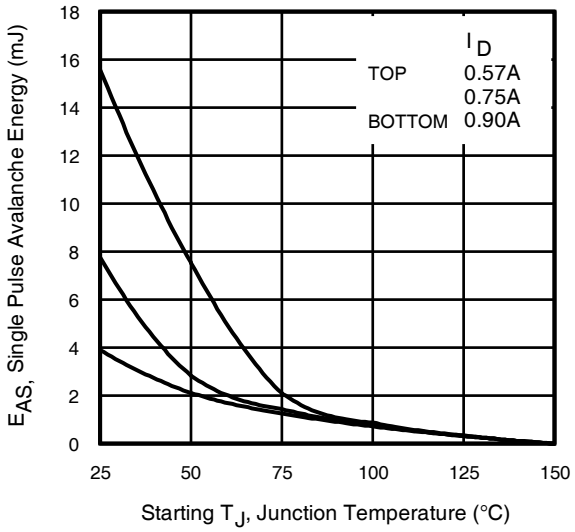


Fig 12c. Maximum Avalanche Energy vs. Drain Current



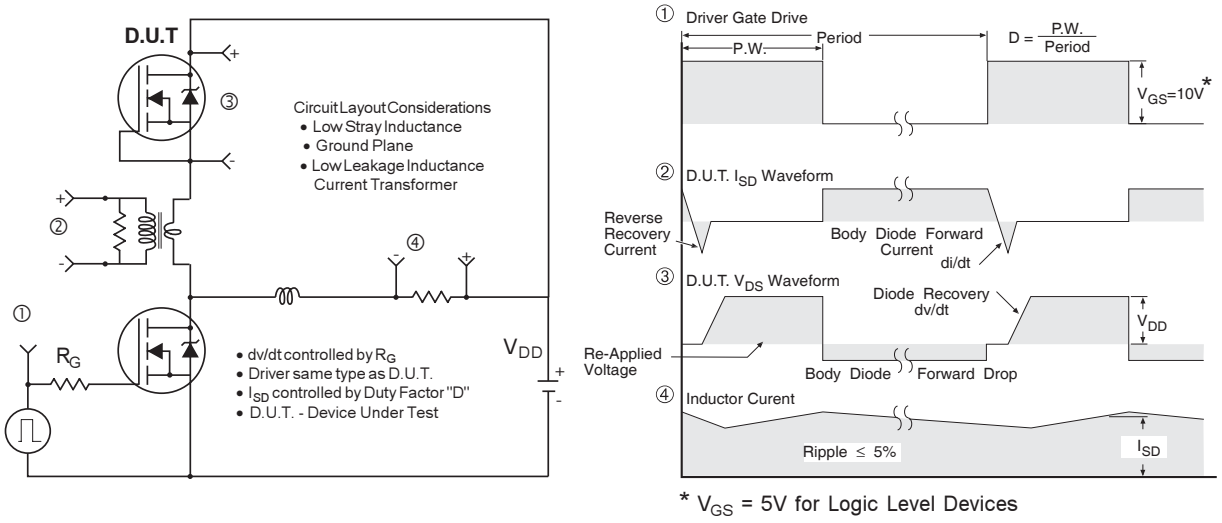


Fig 13. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

Package Outline


Dimensions are shown in milimeters (inches)

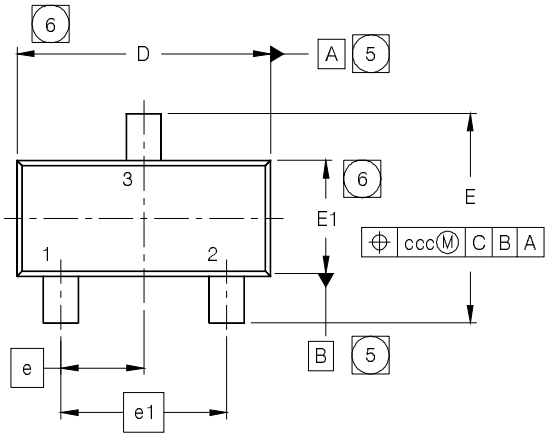


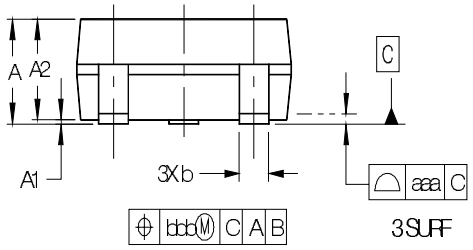

SYMBOL	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.89	1.12	.036	.044
A1	0.01	0.10	.0004	.0039
A2	0.88	1.02	.035	.040
b	0.30	0.50	.0119	.0196
c	0.08	0.20	.0032	.0078
D	2.80	3.04	.111	.119
E	2.10	2.64	.083	.103
E1	1.20	1.40	.048	.055
e	0.95 BSC		.0375 BSC	
e1	1.90 BSC		.075 BSC	
L	0.40	0.60	.0158	.0236
L1	0.25 BSC		.0118 BSC	
θ	0°	8°	0°	8°
aaa	0.10		.004	
bbb	0.20		.008	
ccc	0.15		.006	

RECOMMENDED FOOTPRINT

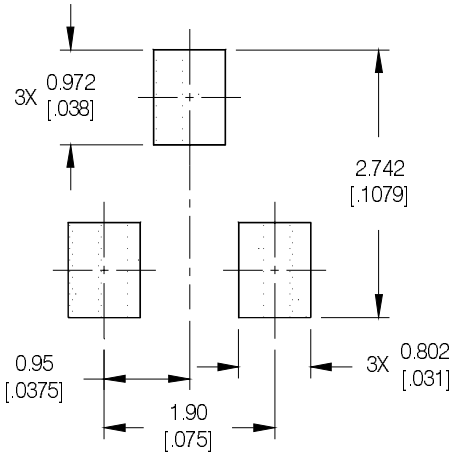


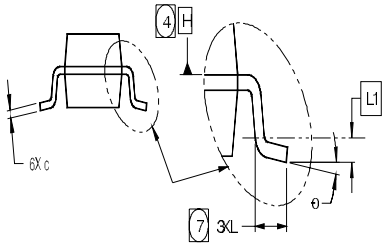

NOTES

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
2. DIMENSIONS ARE SHOWN IN MILLIMETERS AND INCHES.
3. CONTROLLING DIMENSION: MILLIMETER.
4. DATUM PLANE H IS LOCATED AT THE MOLD PARTING LINE.
5. DATUM A AND B TO BE DETERMINED AT DATUM PLANE H.
6. DIMENSIONS D AND E1 ARE MEASURED AT DATUM PLANE H.
7. DIMENSION L IS THE LEAD LENGTH FOR SOLDERING TO A SUBSTRATE.
8. OUTLINE CONFORMS TO JEDEC OUTLINE TO-236AB.

Micro3 (SOT-23/TO-236AB) Part Marking Information

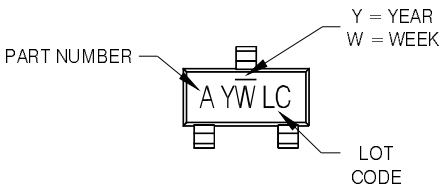

PART NUMBER CODE REFERENCE:

A = IRLML2402
B = IRLML2803
C = IRLML6302
D = IRLML5103
E = IRLML6402
F = IRLML6401
G = IRLML2502
H = IRLML5203

Note: A line above the work week
(as shown here) indicates Lead - Free.

W = (1-26) IF PRECEDED BY LAST DIGIT OF CALENDAR YEAR

YEAR	Y	WORK WEEK	W
2001	1	01	A
2002	2	02	B
2003	3	03	C
2004	4	04	D
2005	5		
2006	6		
2007	7		
2008	8		
2009	9		
2010	0	24	X
		25	Y
		26	Z


W = (27-52) IF PRECEDED BY A LETTER


YEAR	Y	WORK WEEK	W
2001	A	27	A
2002	B	28	B
2003	C	29	C
2004	D	30	D
2005	E		
2006	F		
2007	G		
2008	H		
2009	J		
2010	K	50	X
		51	Y
		52	Z

Tape & Reel Information

SOT-23

Dimensions are shown in millimeters (inches)

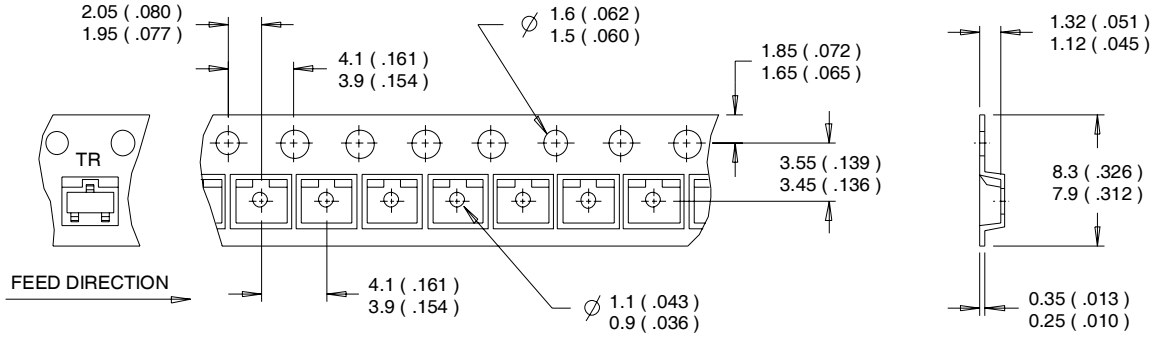

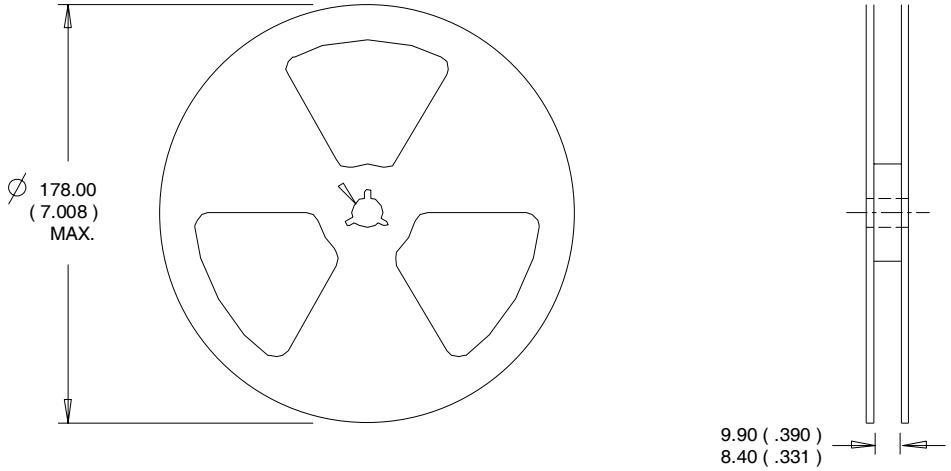

NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information. 04/2007