



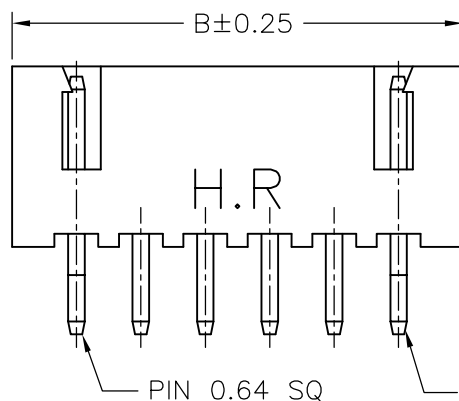


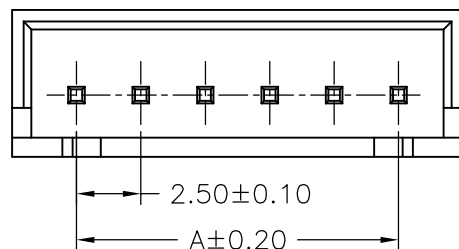


EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



P.C.B LAYOUT

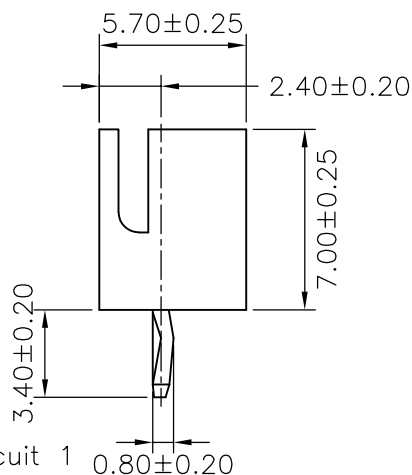

TYPE 1

Ordering Information:

A2501WV-XP ^{*}/₂


1.Part No.

2.Style:


1-Type 1

2-Type 2

3-Type 3



TYPE 2



TYPE 3

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2501WV-02P	2.50	7.50
A2501WV-03P	5.00	10.00
A2501WV-04P	7.50	12.50
A2501WV-05P	10.00	15.00
A2501WV-06P	12.50	17.50
A2501WV-07P	15.00	20.00
A2501WV-08P	17.50	22.50
A2501WV-09P	20.00	25.00
A2501WV-10P	22.50	27.50
A2501WV-11P	25.00	30.00
A2501WV-12P	27.50	32.50
A2501WV-13P	30.00	35.00
A2501WV-14P	32.50	37.50
A2501WV-15P	35.00	40.00
A2501WV-16P	37.50	42.50
A2501WV-17P	40.00	45.00
A2501WV-18P	42.50	47.50
A2501WV-19P	45.00	50.00
A2501WV-20P	47.50	52.50

				JOINT TECH ELECTRONIC CO., LTD.		
				JOY DAY INDUSTRIAL CO., LTD.		
				UNIT	SCALE	SHEET
				mm		1 of 1
			DRAWN BY		APPROVED BY	
			李勤			
			2006.05.17			
			2006.05.17			
			GENERAL TOLERANCE			
A1	REVISE	2007.03.07	X. X±0.25			
A0	NEW RELEASE	2006.05.17	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			
			DRAW NO. :			
			A2501WV- XPX			
			REV. A1			

2. 50mm PITCH
180° WAFER