



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# 8300 Push Button Switches 8(8)A 250Vac & 12(12)A 250Vac



- ▶ Miniature push button
- ▶ 8A Inductive current rating
- ▶ Ratings up to 12(12)A, 250V ac (H suffix)
- ▶ Illuminated and non-illuminated
- ▶ Single and double pole
- ▶ Latching and momentary
- ▶ Slotted actuator for custom buttons
- ▶ Industry standard panel cutout
- ▶ BioCote antimicrobial option
- ▶ Panel cut out: 19.3 x 12.9

## Approvals and specifications



16(4)A 250Vac T85, 1E4 (10,000 Operations)  
 12(12)A 250Vac T105, 1E4 (10,000 Operations)  
 8(8)A 250Vac T105, 5E4 (50,000 Operations)  
 6(6)A 250Vac T125, 5E4 (50,000 Operations)



12A 250Vac DP, 13A 250Vac SP  
 250Vac 1hp, 125Vac 1/2hp  
 UL 85°C, file E45221, CSA file LR10990

### In house test:

10(10)A 250Vac — Indicative rating only



BioCote antimicrobial additive. Independently verified to ISO22196:2007.

3mm contact gap.


Technical data on pages 4 & 5 (switches), 6 (indicators).

**H 8353 J E H -- B**

TERMINAL FUNCTION ACTUATOR BODY HIGHER RATING PRINT, COLOUR, ETC BioCote

push switches

TERMINAL	FUNCTION	ACTUATOR
<p><b>C</b></p> <p>6.3 x 0.8</p> <p>10.1</p>	<p>Approvals &amp; ratings vary with function                      Single pole switches use terminals 1 &amp; 2 (&amp; 3)</p>	<p><b>A</b> Standard actuator</p>
<p><b>H</b></p> <p>4.8 x 0.8</p> <p>8.5</p> <p><b>A</b></p> <p>7.7</p> <p>As "H" but right angle                      4.8 x 0.8</p>	<p><b>8300</b> ON - OFF Single pole</p>	<p><b>H</b> Slotted for custom caps                      Slots for snap-in buttons</p>
<p><b>K</b></p> <p>2.8 x 0.8</p> <p>8.5</p> <p>2.6</p> <p>1.5</p>	<p><b>8301</b> ON - OFF (momentary ON) Single pole</p>	<p><b>C</b> Square actuator</p>
<p><b>T</b></p> <p>2.8 x 0.8</p> <p>7.0</p> <p>2.6</p> <p>1.5</p> <p>Solder</p>	<p><b>8303</b> ON - OFF with light Single pole</p>	<p><b>E</b> Radiused actuator</p>
<p><b>X</b></p> <p>4.5</p> <p>7.0</p> <p>PCB 0.8 Sq</p>	<p><b>8304</b> ON - OFF (momentary ON) with light Single pole</p>	<p><b>F</b> Small round actuator</p>
<p><b>V</b></p> <p>3.7</p> <p>4.3</p> <p>3.7Ctrs</p> <p>Dual pin PCB                      (Call sales for mounting dims)</p>	<p><b>8350</b> ON - OFF Double pole</p>	<p><b>J</b> Smooth curved actuator</p>
	<p><b>8351</b> ON - OFF (momentary ON) Double pole</p>	<p><b>M</b></p> <p>4.5</p> <p>7.0</p>
	<p><b>8353</b> ON - OFF with light Double pole</p>	<p><b>D</b> Large round actuator</p>
	<p><b>8354</b> ON - OFF (momentary ON) with light Double pole</p>	<p>All actuators except H available lit</p>
	<p><b>8355</b> ON - OFF Single pole                      Isolated light - switched                      C, E &amp; M actuators only</p>	
	<p><b>8356</b> ON - OFF Single pole                      Isolated light - unswitched                      C, E &amp; M actuators only</p>	




H8350AB ---  
T8350AB ---



H8353JE ---  
T8353JE ---



H8353EB ---  
T8353EB ---



H8353CB ---  
T8353CB ---



H8350DB ---  
T8350DB ---




H8350HB ---  
Example of button


**BODY**

Panel cut-out Bezel  
Cut-outs must be punched in the direction of insertion

**B** Standard body



**E** Softline style body with radiused bezel



Dimensions for snap-in fixing

Panel thickness	Dimension X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

X and V PCB terminals.  
Additional dummy terminals may be supplied for extra support.

**OPTIONS**

**H**  
12(12)A 250Vac switch rating

**Finish**  
Matt finish standard except on J and D actuators which are gloss

**Colour**  
Call sales for custom colours  
A full range is available for large orders

**Legend printing**  
Select from the examples or call sales for custom legends

**Special buttons**  
Some of the many options are shown  
Call sales for the full range

**L167 Protective cover**  
(designed to IP65)




Snaps on to switch bodies fitted with "A" or "J" style actuators, this reduces panel thickness by 0.8mm


**BioCote Antimicrobial Additive**  
Moulded components have antimicrobial properties using BioCote silver ion technology.

**DIMENSIONS (mm)**

**Actuator A  
Body B**

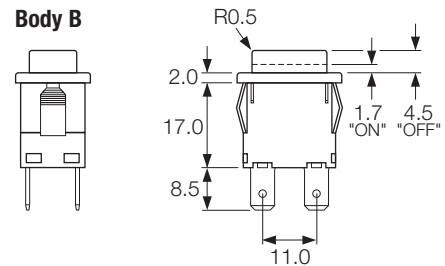

**Actuator J  
Body E**

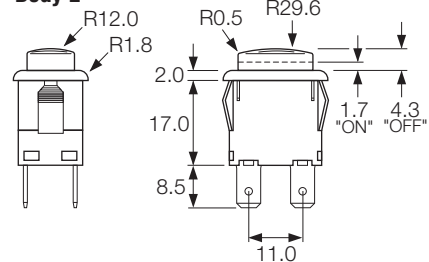

Spacing between centre of terminals 1 & 3 or 2 & 4 is 10.0mm

**Examples of printing**



EN1153



EN1152